
Type BB型 不銹鋼離心泵
STAINLESS-STEEL PUMPS

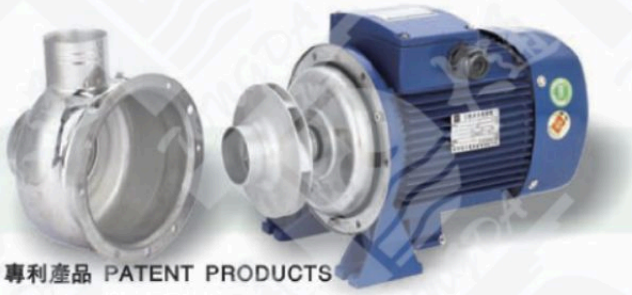

專利產品 PATENT PRODUCTS

用途 APPLICATIONS

本泵全揚程不過載。
本泵適用于工業液體，
家庭廊用，清洗系統，
游泳池和農業灌溉等
清水介質的輸送，
也可以適用于中度腐蝕性液體和乙二醇溶液或其它液體的輸送（需經銷人員的確認）。
輸送液體介質溫度：-15℃~+80℃
最大工作壓力：8bar

This pump can be used at full head without overloading motor. The pumps are suitable for transporting clean water and light corrosive liquid, glycol solution and other liquid which must be allowed by dealer. The pumps can be applied on Industrial applications, domestic, washing, pool, and irrigation etc.
Liquid temperature:-15℃~+80℃
Max. working pressure:8bar

材質 Materials

泵殼、后蓋、葉輪及泵軸采用SUS304材料
Casing,impeller,back cover and pump shaft:SUS304 material.

電機參數 Motor Data

轉速：2900r/min
絕緣等級：F或B
防護等級：IP 55
額定功率：0.55~3kW 0.75~4Hp
頻率：50Hz
電壓：220V 380V
過載保護：用戶自備
外殼材料/底座/支架：鋁
使用環境溫度範圍：-15℃~+40℃

Speed:2900r/min
Insulation Class:F or B
Protection Class:IP 55
Rating Power:0.55~3kW 0.75~4Hp
Frequency:50Hz
Voltage:220V 380V
Overload protection:Prepared by customer
Motor jacket/base/adapter:Aluminium
Ambient temperature range:-15℃~+40℃

型號說明 Symbols:

BB 300 /150 D


- D:單相電機 D: single phase 無符號三相電機Without D:three phase
- 電機功率：1.5kW Motor Power:1.5kW
- 工況點流量：300l/min Operating Point:300l/min
- 閉式葉輪泵 Close impeller pump

性能參數表　Performance Date

2900rpm

型號 Model		功率 Power		流　量 Capacity							
單相 Single phase 220V 50HZ	三相 Three phase 380V 50HZ	KW	HP	m^3/h	6	12	18	24	28	36	42
				l/min	100	200	300	400	500	600	700
				揚　程 Head (m)							
BB250/055D	BB250/055	0.55	0.75		10.5	9	7	3	—	—	—
BB250/075D	BB250/075	0.75	1.0		14.5	13	10	6	—	—	—
BB300/110D	BB300/110	1.1	1.5		18.5	16.5	13.5	9.5	—	—	—
BB300/150D	BB300/150	1.5	2.0		22.5	20.5	17.5	13.5	—	—	—
BB500/150D	BB500/150	1.5	2.0		—	16	15	13.5	11.5	9.5	6
BB500/220D	BB500/220	2.2	3.0		—	21.5	20	18.5	16.5	14.5	11.5
	BB500/300	3.0	4.0		—	24	22.5	21	19	17	14

BB泵型普圖　BB Pump Curves

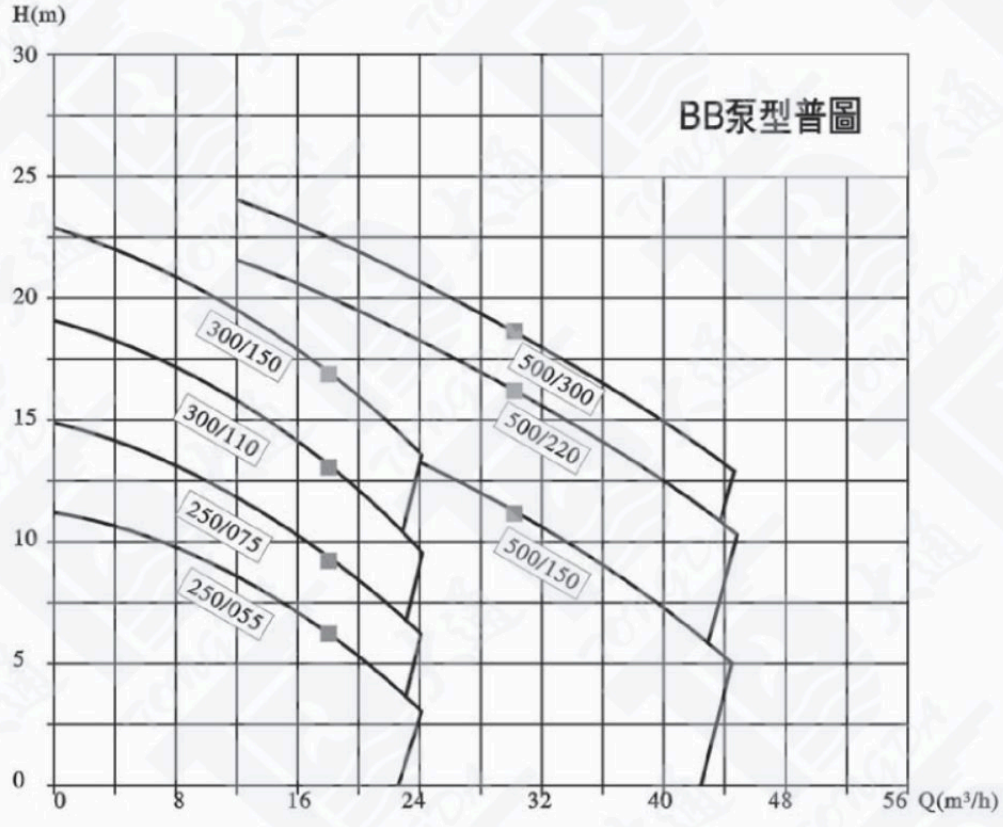


Type BB型 不銹鋼離心泵
STAINLESS-STEEL PUMPS



泵體部件表 Parts list:

序號 No.	部件名稱 Description	序號 No.	部件名稱 Description	序號 No.	部件名稱 Description	序號 No.	部件名稱 Description
1	電機 Motor	5	機械密封靜環 Stationary Ring of Mech.seal	8	墊圈 Washer	12	O形圈 O ring
2	唇形密封 "V" Slinger	6	機械密封動環 Rotary Ring of Mech.seal	9	葉輪蓋母 Impeller Nut	13	泵體 Casing
3	后蓋 Back Cover	7	葉輪 Impeller	10	灌排水孔螺釘 Priming/Drain Bolt	14	外六角螺栓 Screw
4	O形圈 O ring			11	凹形墊圈 "L" Washer	15	内六角螺栓 Screw

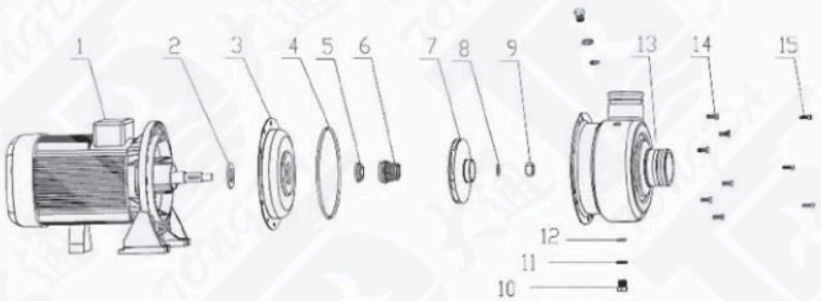

安裝尺寸 Installation dimension

型號 Model	A	C	C1	F	H	H1	H2	N	N1	N2	S	W	W1	B	D1	DNA	D2	DNM
BB250/055	74.5	170	20	358	226	108	118	120	160	80	9	84	52	90	Ø52	G1"1/2	Ø52	G1"1/2
BB250/075	74.5	170	20	358	226	108	118	120	160	80	9	84	52	90	Ø52	G1"1/2	Ø52	G1"1/2
BB300/110	82	193	20	364	253	120	133	140	180	100	9	100	52	74	Ø63	G2"	Ø63	G2"
BB300/150	82	193	20	364	253	120	133	140	180	100	9	100	52	74	Ø63	G2"	Ø63	G2"
BB500/150	82	193	20	364	253	120	133	140	180	100	9	100	52	74	Ø63	G2"	Ø63	G2"
BB500/220	82	193	20	390	253	120	133	140	180	100	9	100	52	65	Ø63	G2"	Ø63	G2"
BB500/300	82	193	20	390	253	120	133	140	180	100	9	100	52	65	Ø63	G2"	Ø63	G2"

外形尺寸圖 Outline dimension

