
Appication and Features

- Water supply for agricultral and horticutural irrigation
- Construction dewatering
- Mine/Quarry dewatering
- Sea water application

- Integrated with three phase motor
- 50Hz/60Hz
- 35°C max. temperature
- 0.25% max. sand content
- Curve tolerance as per ISO9906

Performance Curve

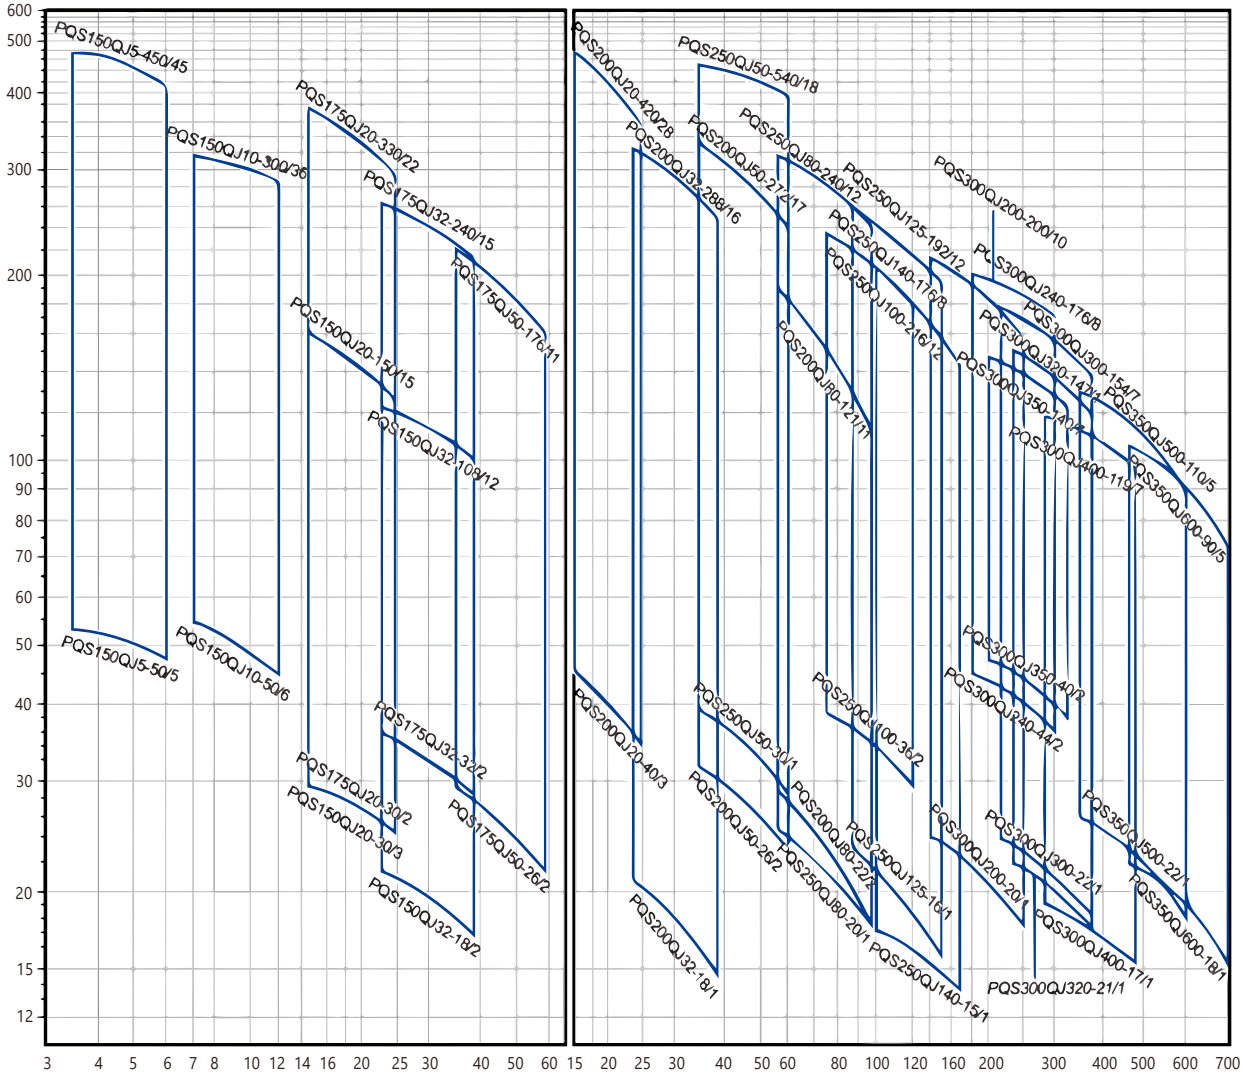

* Cast pump stages are available in stainless steel.

Date Sheet

150QJ10 (min. 6in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ150QJ10-50	10	50	3	143	2″	6
PQ150QJ10-75	10	75	4	143	2″	6
PQ150QJ10-100	10	100	5.5	143	2″	6
PQ150QJ10-125	10	125	7.5	143	2″	6
PQ150QJ10-150	10	150	9.2	143	2″	6
PQ150QJ10-175	10	175	9.2	143	2″	6
PQ150QJ10-200	10	200	11	143	2″	10
PQ150QJ10-225	10	225	13	143	2″	10
PQ150QJ10-250	10	250	13	143	2″	10
PQ150QJ10-275	10	275	15	143	2″	16
PQ150QJ10-300	10	300	15	143	2″	16

150QJ20 (min. 6in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ150QJ20-30	20 m^3/h	30	3	143	2″	6
PQ150QJ20-40	20 m^3/h	40	4	143	2″	6
PQ150QJ20-50	20 m^3/h	50	5.5	143	2″	6
PQ150QJ20-60	20 m^3/h	60	7.5	143	2″	6
PQ150QJ20-70	20 m^3/h	70	7.5	143	2″	6
PQ150QJ20-80	20 m^3/h	80	9.2	143	2″	6
PQ150QJ20-90	20 m^3/h	90	9.2	143	2″	6
PQ150QJ20-100	20 m^3/h	100	11	143	2″	6
PQ150QJ20-110	20 m^3/h	110	11	143	2″	6
PQ150QJ20-120	20 m^3/h	120	13	143	2″	6
PQ150QJ20-130	20 m^3/h	130	13	143	2″	6
PQ150QJ20-140	20 m^3/h	140	15	143	2″	10
PQ150QJ20-150	20 m^3/h	150	15	143	2″	10
PQ150QJ20-160	20 m^3/h	160	18.5	143	2″	10
PQ150QJ20-170	20 m^3/h	170	18.5	143	2″	10
PQ150QJ20-180	20 m^3/h	180	18.5	143	2″	10

150QJ32 (min. 6in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ150QJ32-18	32 m^3/h	18	3	143	3″	6
PQ150QJ32-27	32 m^3/h	27	4	143	3″	6
PQ150QJ32-36	32 m^3/h	36	5.5	143	3″	6
PQ150QJ32-45	32 m^3/h	45	7.5	143	3″	6
PQ150QJ32-54	32 m^3/h	54	9.2	143	3″	6
PQ150QJ32-63	32 m^3/h	63	11	143	3″	6
PQ150QJ32-72	32 m^3/h	72	13	143	3″	6
PQ150QJ32-81	32 m^3/h	81	13	143	3″	6
PQ150QJ32-90	32 m^3/h	90	15	143	3″	6
PQ150QJ32-99	32 m^3/h	99	15	143	3″	6
PQ150QJ32-108	32 m^3/h	108	18.5	143	3″	10
PQ150QJ32-117	32 m^3/h	117	18.5	143	3″	10

200QJ20 (min. 8in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ200QJ20-40	20 m^3/h	40	4	168	2″	6
PQ200QJ20-54	20 m^3/h	54	5.5	168	2″	6
PQ200QJ20-67	20 m^3/h	67	7.5	168	2″	6
PQ200QJ20-81	20 m^3/h	81	7.5	168	2″	6
PQ200QJ20-94	20 m^3/h	94	9.2	168	2″	6
PQ200QJ20-108	20 m^3/h	108	11	168	2″	6
PQ200QJ20-121	20 m^3/h	121	13	168	2″	6
PQ200QJ20-135	20 m^3/h	135	13	168	2″	6
PQ200QJ20-148	20 m^3/h	148	15	184	2″	10
PQ200QJ20-162	20 m^3/h	162	18.5	184	2″	10
PQ200QJ20-175	20 m^3/h	175	18.5	184	2″	10
PQ200QJ20-189	20 m^3/h	189	18.5	184	2″	16
PQ200QJ20-202	20 m^3/h	202	22	184	2″	16
PQ200QJ20-216	20 m^3/h	216	22	184	2″	16
PQ200QJ20-229	20 m^3/h	229	22	184	2″	16
PQ200QJ20-243	20 m^3/h	243	25	184	2.5″	25
PQ200QJ20-256	20 m^3/h	256	25	184	2.5″	25
PQ200QJ20-270	20 m^3/h	270	30	184	2.5″	25

200QJ32 (min. 8in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ200QJ32-18	32 m^3/h	18	3	168	3″	6
PQ200QJ32-36	32 m^3/h	36	5.5	168	3″	6
PQ200QJ32-54	32 m^3/h	54	9.2	168	3″	6
PQ200QJ32-72	32 m^3/h	72	11	168	3″	6
PQ200QJ32-90	32 m^3/h	90	13	168	3″	6
PQ200QJ32-108	32 m^3/h	108	15	168	3″	6
PQ200QJ32-126	32 m^3/h	126	18.5	168	3″	10
PQ200QJ32-144	32 m^3/h	144	22	168	3″	10
PQ200QJ32-162	32 m^3/h	162	25	184	3″	16
PQ200QJ32-180	32 m^3/h	180	30	184	3″	16
PQ200QJ32-198	32 m^3/h	198	30	184	3″	25
PQ200QJ32-216	32 m^3/h	216	37	184	3″	25
PQ200QJ32-234	32 m^3/h	234	37	184	3″	25
PQ200QJ32-252	32 m^3/h	252	37	184	3″	35
PQ200QJ32-270	32 m^3/h	270	45	184	3″	35
PQ200QJ32-288	32 m^3/h	288	45	184	3″	35
PQ200QJ32-306	32 m^3/h	306	55	184	3″	35

200QJ40 (min. 8in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ200QJ40-18	40 m^3/h	18	4	168	3″	6
PQ200QJ40-36	40 m^3/h	36	7.5	168	3″	6
PQ200QJ40-54	40 m^3/h	54	9.2	168	3″	6
PQ200QJ40-72	40 m^3/h	72	13	168	3″	6
PQ200QJ40-90	40 m^3/h	90	18.5	168	3″	10
PQ200QJ40-108	40 m^3/h	108	22	168	3″	10
PQ200QJ40-126	40 m^3/h	126	25	168	3″	16
PQ200QJ40-144	40 m^3/h	144	25	168	3″	16
PQ200QJ40-162	40 m^3/h	162	30	184	3″	16
PQ200QJ40-180	40 m^3/h	180	37	184	3″	25
PQ200QJ40-198	40 m^3/h	198	37	184	3″	25
PQ200QJ40-216	40 m^3/h	216	45	184	3″	35
PQ200QJ40-234	40 m^3/h	234	45	184	3″	35
PQ200QJ40-252	40 m^3/h	252	45	184	3″	35

200QJ50 (min. 8in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ200QJ50-32	50 m^3/h	32	9.2	184	3″	6
PQ200QJ50-48	50 m^3/h	48	11	184	3″	6
PQ200QJ50-64	50 m^3/h	64	15	184	3″	6
PQ200QJ50-80	50 m^3/h	80	18.5	184	3″	10
PQ200QJ50-96	50 m^3/h	96	22	184	3″	10
PQ200QJ50-112	50 m^3/h	112	25	184	3″	16
PQ200QJ50-128	50 m^3/h	128	30	184	3″	16
PQ200QJ50-144	50 m^3/h	144	30	184	3″	16
PQ200QJ50-160	50 m^3/h	160	37	184	3″	25
PQ200QJ50-176	50 m^3/h	176	45	184	3″	25
PQ200QJ50-192	50 m^3/h	192	45	184	3″	25
PQ200QJ50-208	50 m^3/h	208	45	184	3″	25
PQ200QJ50-224	50 m^3/h	224	55	184	3″	35
PQ200QJ50-240	50 m^3/h	240	55	184	3″	35
PQ200QJ50-256	50 m^3/h	256	55	184	3″	35
PQ200QJ50-272	50 m^3/h	272	63	184	3″	50

200QJ63 (min. 8in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ200QJ63-24	63 m^3/h	24	7.5	184	3″	6
PQ200QJ63-36	63 m^3/h	36	11	184	3″	6
PQ200QJ63-48	63 m^3/h	48	13	184	3″	6
PQ200QJ63-60	63 m^3/h	60	18.5	184	3″	10
PQ200QJ63-72	63 m^3/h	72	22	184	3″	10
PQ200QJ63-84	63 m^3/h	84	25	184	3″	16
PQ200QJ63-96	63 m^3/h	96	30	184	3″	16
PQ200QJ63-108	63 m^3/h	108	30	184	3″	16
PQ200QJ63-120	63 m^3/h	120	37	184	3″	25
PQ200QJ63-132	63 m^3/h	132	37	184	3″	25
PQ200QJ63-144	63 m^3/h	144	45	184	3″	25
PQ200QJ63-156	63 m^3/h	156	45	184	3″	25
PQ200QJ63-168	63 m^3/h	168	45	184	3″	25
PQ200QJ63-180	63 m^3/h	180	55	184	3″	35
PQ200QJ63-192	63 m^3/h	192	55	184	3″	35
PQ200QJ63-204	63 m^3/h	204	55	184	3″	35
PQ200QJ63-216	63 m^3/h	216	63	184	3″	35
PQ200QJ63-228	63 m^3/h	228	63	184	3″	35

200QJ80 (min. 8in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ200QJ80-22	80 m^3/h	22	7.5	168	4″	6
PQ200QJ80-33	80 m^3/h	33	11	168	4″	6
PQ200QJ80-44	80 m^3/h	44	15	168	4″	6
PQ200QJ80-55	80 m^3/h	55	18.5	168	4″	10
PQ200QJ80-66	80 m^3/h	66	22	168	4″	10
PQ200QJ80-77	80 m^3/h	77	25	168	4″	16
PQ200QJ80-88	80 m^3/h	88	30	168	4″	16
PQ200QJ80-99	80 m^3/h	99	37	168	4″	25
PQ200QJ80-110	80 m^3/h	110	37	184	4″	25
PQ200QJ80-121	80 m^3/h	121	45	184	4″	25
PQ200QJ80-132	80 m^3/h	132	45	184	4″	25
PQ200QJ80-143	80 m^3/h	143	55	184	4″	25
PQ200QJ80-154	80 m^3/h	154	55	184	4″	25

200QJ100 (min. 8in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ200QJ100-30	100 m^3/h	30	13	168	4″	6
PQ200QJ100-40	100 m^3/h	40	18.5	168	4″	10
PQ200QJ100-50	100 m^3/h	50	22	168	4″	10
PQ200QJ100-60	100 m^3/h	60	30	168	4″	16
PQ200QJ100-70	100 m^3/h	70	30	168	4″	16
PQ200QJ100-80	100 m^3/h	80	37	168	4″	25
PQ200QJ100-90	100 m^3/h	90	45	168	4″	25
PQ200QJ100-100	100 m^3/h	100	45	168	4″	25
PQ200QJ100-110	100 m^3/h	110	55	184	4″	25
PQ200QJ100-120	100 m^3/h	120	55	184	4″	25
PQ200QJ100-130	100 m^3/h	130	55	184	4″	25
PQ200QJ100-140	100 m^3/h	140	63	184	4″	35
PQ200QJ100-150	100 m^3/h	150	63	184	4″	35

250QJ50 (min. 10in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ250QJ50-30	50 m^3/h	30	7.5	233	3″	6
PQ250QJ50-60	50 m^3/h	60	15	233	3″	6
PQ250QJ50-90	50 m^3/h	90	22	233	3″	10
PQ250QJ50-120	50 m^3/h	120	30	233	3″	16
PQ250QJ50-150	50 m^3/h	150	37	233	3″	25
PQ250QJ50-180	50 m^3/h	180	45	233	3″	25
PQ250QJ50-210	50 m^3/h	210	55	233	3″	35
PQ250QJ50-240	50 m^3/h	240	63	233	3″	50
PQ250QJ50-270	50 m^3/h	270	63	233	5″	50
PQ250QJ50-300	50 m^3/h	300	75	233	5″	70
PQ250QJ50-330	50 m^3/h	330	75	233	5″	70
PQ250QJ50-360	50 m^3/h	360	90	233	5″	95
PQ250QJ50-390	50 m^3/h	390	90	233	5″	95
PQ250QJ50-420	50 m^3/h	420	100	233	5″	50*2
PQ250QJ50-450	50 m^3/h	450	110	233	5″	70*2
PQ250QJ50-480	50 m^3/h	480	125	233	5″	70*2
PQ250QJ50-510	50 m^3/h	510	125	233	5″	70*2
PQ250QJ50-540	50 m^3/h	540	125	233	5″	70*2
PQ250QJ50-600	50 m^3/h	600	150	233	5″	95*2

250QJ63 (min. 10in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ250QJ63-30	63 m^3/h	30	9.2	233	4″	6
PQ250QJ63-60	63 m^3/h	60	18.5	233	4″	10
PQ250QJ63-90	63 m^3/h	90	25	233	4″	16
PQ250QJ63-120	63 m^3/h	120	37	233	4″	25
PQ250QJ63-150	63 m^3/h	150	44	233	4″	25
PQ250QJ63-180	63 m^3/h	180	55	233	4″	35
PQ250QJ63-210	63 m^3/h	210	64	233	4″	35
PQ250QJ63-240	63 m^3/h	240	75	233	4″	50
PQ250QJ63-270	63 m^3/h	270	75	233	4″	70
PQ250QJ63-300	63 m^3/h	300	87	233	4″	70
PQ250QJ63-330	63 m^3/h	330	100	233	4″	50*2
PQ250QJ63-360	63 m^3/h	360	110	233	4″	50*2
PQ250QJ63-390	63 m^3/h	390	110	233	4″	50*2
PQ250QJ63-420	63 m^3/h	420	125	233	4″	70*2
PQ250QJ63-450	63 m^3/h	450	132	233	4″	70*2
PQ250QJ63-480	63 m^3/h	480	140	233	4″	70*2
PQ250QJ63-510	63 m^3/h	510	150	233	5″	70*2
PQ250QJ63-540	63 m^3/h	540	150	233	5″	70*2

250QJ80 (min. 10in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ250QJ80-30	80 m^3/h	30	11	233	4″	6
PQ250QJ80-60	80 m^3/h	60	22	233	4″	10
PQ250QJ80-90	80 m^3/h	90	30	233	4″	16
PQ250QJ80-120	80 m^3/h	120	45	233	4″	25
PQ250QJ80-150	80 m^3/h	150	55	233	4″	25
PQ250QJ80-180	80 m^3/h	180	63	233	4″	35
PQ250QJ80-210	80 m^3/h	210	75	233	4″	50
PQ250QJ80-240	80 m^3/h	240	90	233	4″	70
PQ250QJ80-270	80 m^3/h	270	100	233	4″	70
PQ250QJ80-300	80 m^3/h	300	110	233	4″	70
PQ250QJ80-330	80 m^3/h	330	125	233	4″	50*2
PQ250QJ80-420	80 m^3/h	420	150	233	4″	70*2

250QJ100 (min. 10in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ250QJ100-27	100 m^3/h	27	13	233	4″	6
PQ250QJ100-54	100 m^3/h	54	25	233	4″	16
PQ250QJ100-81	100 m^3/h	81	37	233	4″	25
PQ250QJ100-108	100 m^3/h	108	45	233	4″	25
PQ250QJ100-135	100 m^3/h	135	63	233	4″	35
PQ250QJ100-162	100 m^3/h	162	75	233	5″	35
PQ250QJ100-189	100 m^3/h	189	90	233	5″	50
PQ250QJ100-216	100 m^3/h	216	100	233	5″	70
PQ250QJ100-243	100 m^3/h	243	110	233	5″	70
PQ250QJ100-270	100 m^3/h	270	125	233	5″	50*2
PQ250QJ100-297	100 m^3/h	297	125	233	5″	50*2
PQ250QJ100-324	100 m^3/h	324	132	233	5″	70*2
PQ250QJ100-351	100 m^3/h	351	150	233	5″	70*2

250QJ125 (min. 10in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ250QJ125-24	125 m^3/h	24	13	233	5″	6
PQ250QJ125-48	125 m^3/h	48	30	233	5″	16
PQ250QJ125-72	125 m^3/h	72	37	233	5″	25
PQ250QJ125-96	125 m^3/h	96	55	233	5″	25
PQ250QJ125-120	125 m^3/h	120	64	233	5″	35
PQ250QJ125-144	125 m^3/h	144	75	233	5″	50
PQ250QJ125-168	125 m^3/h	168	87	233	5″	50
PQ250QJ125-192	125 m^3/h	192	110	233	5″	70
PQ250QJ125-216	125 m^3/h	216	110	233	5″	70
PQ250QJ125-240	125 m^3/h	240	125	233	5″	35*2
PQ250QJ125-264	125 m^3/h	264	140	233	5″	50*2
PQ250QJ125-288	125 m^3/h	288	150	233	5″	50*2

250QJ140 (min. 10in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ250QJ140-22	140 m^3/h	22	13	233	5″	6
PQ250QJ140-44	140 m^3/h	44	30	233	5″	16
PQ250QJ140-66	140 m^3/h	66	45	233	5″	25
PQ250QJ140-88	140 m^3/h	88	55	233	5″	25
PQ250QJ140-110	140 m^3/h	110	75	233	5″	35
PQ250QJ140-132	140 m^3/h	132	90	233	5″	50
PQ250QJ140-154	140 m^3/h	154	100	233	5″	50
PQ250QJ140-176	140 m^3/h	176	110	233	5″	70
PQ250QJ140-198	140 m^3/h	198	125	233	5″	35*2
PQ250QJ140-220	140 m^3/h	220	132	233	5″	50*2
PQ250QJ140-242	140 m^3/h	242	150	233	5″	50*2

250QJ160 (min. 10in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ250QJ160-25	160 m^3/h	25	18.5	233	6″	10
PQ250QJ160-50	160 m^3/h	50	37	233	6″	25
PQ250QJ160-75	160 m^3/h	75	55	233	6″	25
PQ250QJ160-100	160 m^3/h	100	75	233	6″	35
PQ250QJ160-125	160 m^3/h	125	87	233	6″	50
PQ250QJ160-150	160 m^3/h	150	110	233	6″	50
PQ250QJ160-175	160 m^3/h	175	125	233	6″	35*2
PQ250QJ160-200	160 m^3/h	200	140	233	6″	50*2

300QJ200 (min. 12in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ300QJ200-30	200 m^3/h	30	30	281	6″	16
PQ300QJ200-60	200 m^3/h	60	55	281	6″	25
PQ300QJ200-90	200 m^3/h	90	75	281	6″	35
PQ300QJ200-120	200 m^3/h	120	110	281	6″	35*2
PQ300QJ200-150	200 m^3/h	150	140	281	6″	35*2
PQ300QJ200-180	200 m^3/h	180	160	281	6″	50*2
PQ300QJ200-210	200 m^3/h	210	180	281	6″	50*2
PQ300QJ200-240	200 m^3/h	240	220	281	6″	70*2
PQ300QJ200-270	200 m^3/h	270	220	281	6″	70*2

300QJ240 (min. 12in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ300QJ240-22	240 m^3/h	22	22	281	6″	10
PQ300QJ240-44	240 m^3/h	44	45	281	6″	25
PQ300QJ240-66	240 m^3/h	66	75	281	6″	35
PQ300QJ240-88	240 m^3/h	88	90	281	6″	50
PQ300QJ240-110	240 m^3/h	110	110	281	6″	35*2
PQ300QJ240-132	240 m^3/h	132	140	281	6″	50*2
PQ300QJ240-154	240 m^3/h	154	160	281	6″	50*2
PQ300QJ240-176	240 m^3/h	176	185	281	6″	50*2

300QJ300 (min. 12in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ300QJ300-22	300 m^3/h	22	30	281	8″	16
PQ300QJ300-44	300 m^3/h	44	55	281	8″	25
PQ300QJ300-66	300 m^3/h	66	87	281	8″	50
PQ300QJ300-88	300 m^3/h	88	120	281	8″	35*2
PQ300QJ300-110	300 m^3/h	110	140	281	8″	50*2
PQ300QJ300-132	300 m^3/h	132	185	281	8″	50*2
PQ300QJ300-154	300 m^3/h	154	220	281	8″	70*2

300QJ320 (min. 12in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ300QJ320-21	320 m^3/h	21	30	281	8″	16
PQ300QJ320-42	320 m^3/h	42	55	281	8″	25
PQ300QJ320-63	320 m^3/h	63	90	281	8″	50
PQ300QJ320-84	320 m^3/h	84	110	281	8″	35*2
PQ300QJ320-105	320 m^3/h	105	140	281	8″	50*2
PQ300QJ320-126	320 m^3/h	126	185	281	8″	50*2
PQ300QJ320-147	320 m^3/h	147	220	281	8″	70*2

300QJ350 (min. 12in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ300QJ350-20	350 m^3/h	20	30	281	8″	16
PQ300QJ350-40	350 m^3/h	40	55	281	8″	25
PQ300QJ350-60	350 m^3/h	60	87	281	8″	50
PQ300QJ350-80	350 m^3/h	80	120	281	8″	35*2
PQ300QJ350-100	350 m^3/h	100	140	281	8″	50*2
PQ300QJ350-120	350 m^3/h	120	180	281	8″	50*2
PQ300QJ350-140	350 m^3/h	140	220	281	8″	70*2

300QJ400 (min. 12in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ300QJ400-17	400 m^3/h	17	30	281	8″	16
PQ300QJ400-34	400 m^3/h	34	55	281	8″	25
PQ300QJ400-51	400 m^3/h	51	87	281	8″	50
PQ300QJ400-68	400 m^3/h	68	120	281	8″	35*2
PQ300QJ400-85	400 m^3/h	85	140	281	8″	50*2
PQ300QJ400-102	400 m^3/h	102	180	281	8″	50*2
PQ300QJ400-119	400 m^3/h	119	220	281	8″	70*2
PQ300QJ400-153	400 m^3/h	153	250	281	8″	70*2

350QJ500 (min. 14in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ350QJ500-22	500 m^3/h	22	45	330	8″	25
PQ350QJ500-44	500 m^3/h	44	90	330	8″	50
PQ350QJ500-66	500 m^3/h	66	140	330	8″	50*2
PQ350QJ500-88	500 m^3/h	88	185	330	8″	50*2
PQ350QJ500-110	500 m^3/h	110	220	330	8″	70*2

350QJ600 (min. 14in borehole diameter)

Model	Flow Rate m^3/h	Head m	Power kW	OD mm	Outlet	Cross Section mm^2
PQ350QJ600-18	600 m^3/h	18	45	330	8″	25
PQ350QJ600-36	600 m^3/h	36	90	330	8″	50
PQ350QJ600-48	600 m^3/h	48	140	330	8″	50*2
PQ350QJ600-72	600 m^3/h	72	185	330	8″	50*2
PQ350QJ600-90	600 m^3/h	90	220	330	8″	70*2