


SAP型中开泵
SAP split-case pump



S型中开泵
S split-case pump



XBD中开式电动消防泵
XBD split-case electric fire pump

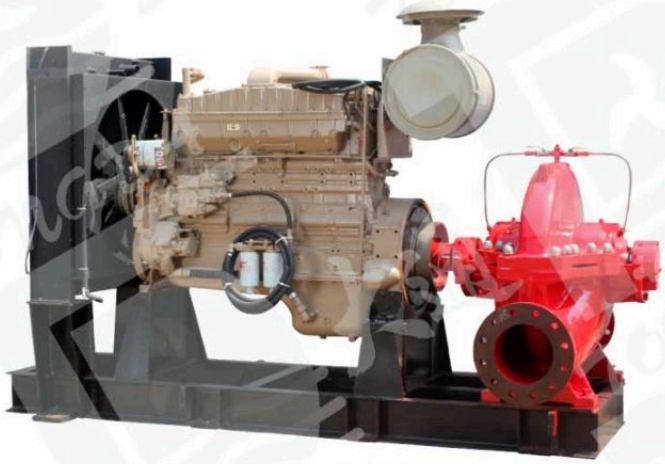

XBC柴油机消防泵
XBC Diesel Fire Pump

概　述

S、SM、SF、SL、SY、SA、SAP、SAL、RS、XBD、XBC型泵为单级双吸水平中开式离心泵，供输送不含固体颗粒的清水或物理化学性质类似于清水的其它液体，被输送液体的温度为0℃～80℃。适用于工厂、矿山、城市给水、电站、农田排灌和各种水利工程。允许最大进口压力是0.6MPa

参数范围（设计点）

流量	108~10800m³/h
扬程	8.5~140m

型号说明

300S(SM、SY、SF)–58A

300	吸入口径300mm
S	单级双吸水平中开式离心泵
SM	单级双吸耐磨泵
SY	单级双吸油泵
SF	单级双吸耐腐蚀泵
58	设计点扬程
A	表示叶轮外径第一次变化，A、B、C……依次类推

结构说明

S、SM、SF、SL、SY、SA、SAP、SAL、RS、XBD、XBC型泵的吸入口与吐出口均在水泵轴心线下方。与轴线垂直成水平方向。检修时勿需拆卸进出口水管及电动机。

泵的主要零件有泵体、泵盖、叶轮、轴、轴套、双吸密封环等，其中叶轮、轴套、双吸密封环为易损件。

叶轮用轴套和轴套螺母固定在轴上，其轴向位置可以通过轴套螺母进行调整．叶轮的轴向力通过其自身叶片对称布置达到平衡。

双吸密封环用以减小水泵压水室的水漏回吸水室。

泵的轴封分填料密封和机械密封两种，轴承润滑方式分干油润滑和稀油润滑两种，当泵口径为800mm以下基本采用干油润滑，泵口径为800mm以上基本采用稀油润滑。

泵通过弹性联轴器与电动机联接。

泵的旋转方向

从传动端看，泵为顺时针方向旋转，此时吸入口在右，吐出口在左。(如用户需要，亦可改为逆时针方向旋转)

GENERAL

Type S、SM、SF、SL、SY、SA、SAP、SAL、RS、XBD、XBC pump is single–stage double–suction centrifugal pump with horizontal split casing. It is provided for delivering clear water without solid particles or other liquid which is physically and chemically similar to clear water. The temperature of the liquid is 0℃～80℃. It is widely used in fields of factories, mines, municipal wate supply, power stations, agriculture irrigation and water conservancy. Permissible maximum inlet pressure is 0.6Mpa.

PERFORMANCE RANGE

Capacity	Q	108～10800m³/h
Head	H	8.5～140m

THE DESCRIPTION OF PUMP TYPE

For example 300S(SM、SY、SF)–58A

300	Inlet diameter is 300mm
S	Single–stage double–suction centrifugal pump with horizontal split casing
SM	Single–stage double–suction wearable centrifugal pump
SY	Single–stage double–suction centrifugal oil pump
SF	Single–stage double–suction anti–corrosive centrifugal pump
58	Head at design point(m)
A	A，B，C separately represents outer diameter of impeller has been cut the first,the second and the third time

CONSTRUCTION

The inlet and the outlet of the pump are under the axis and their centerline is perpendicular to the axis. It is unnecessary to disturb the inlet piping, the outlet piping and the motor while inspection.

The main parts of the pump consist of casing, pump cover, impeller, shaft, shaft sleeve and double–suction wearing ring, etc. Impeller, shaft sleeve and double–suction wearing ring are consumable parts.

The impeller is fixed on the shaft with the shaft sleeves and the sleeve nuts. Its axial displacement will be adjusted by the sleeve nut. The thrust of the impeller will be balanced with the help of symmetric vanes.

The double–suction wearing ring is to reduce leakage from pressure water house to suction house.

The shaft seal is either packing seal or mechanical seal. The bearing lubricated oil has dry–oil and dilute–oil. When the inlet diameter of the pump is less than 800mm, the bearing gets lubricated with dry–oil. When the inlet diameter is more than 800mm，the bearing gets lubricated with diluteoil.


The pump is connected with the motor through flexible coupling.

THE DIRECTION OF ROTATION

The rotation of the pump rotor is clockwise looking from the driver to the pump, i.e. the inlet is on the right and the outlet is on the left. It is also counter clockwise according to customers' requirement.

S、SM、SY、SF型 泵结构图（吸入口径小于800mm）（结构一）


Sectional Arrangment Figure For Type S、SM、SY、SF Pump(Inlet Dia. < 800mm)(Fig.1)

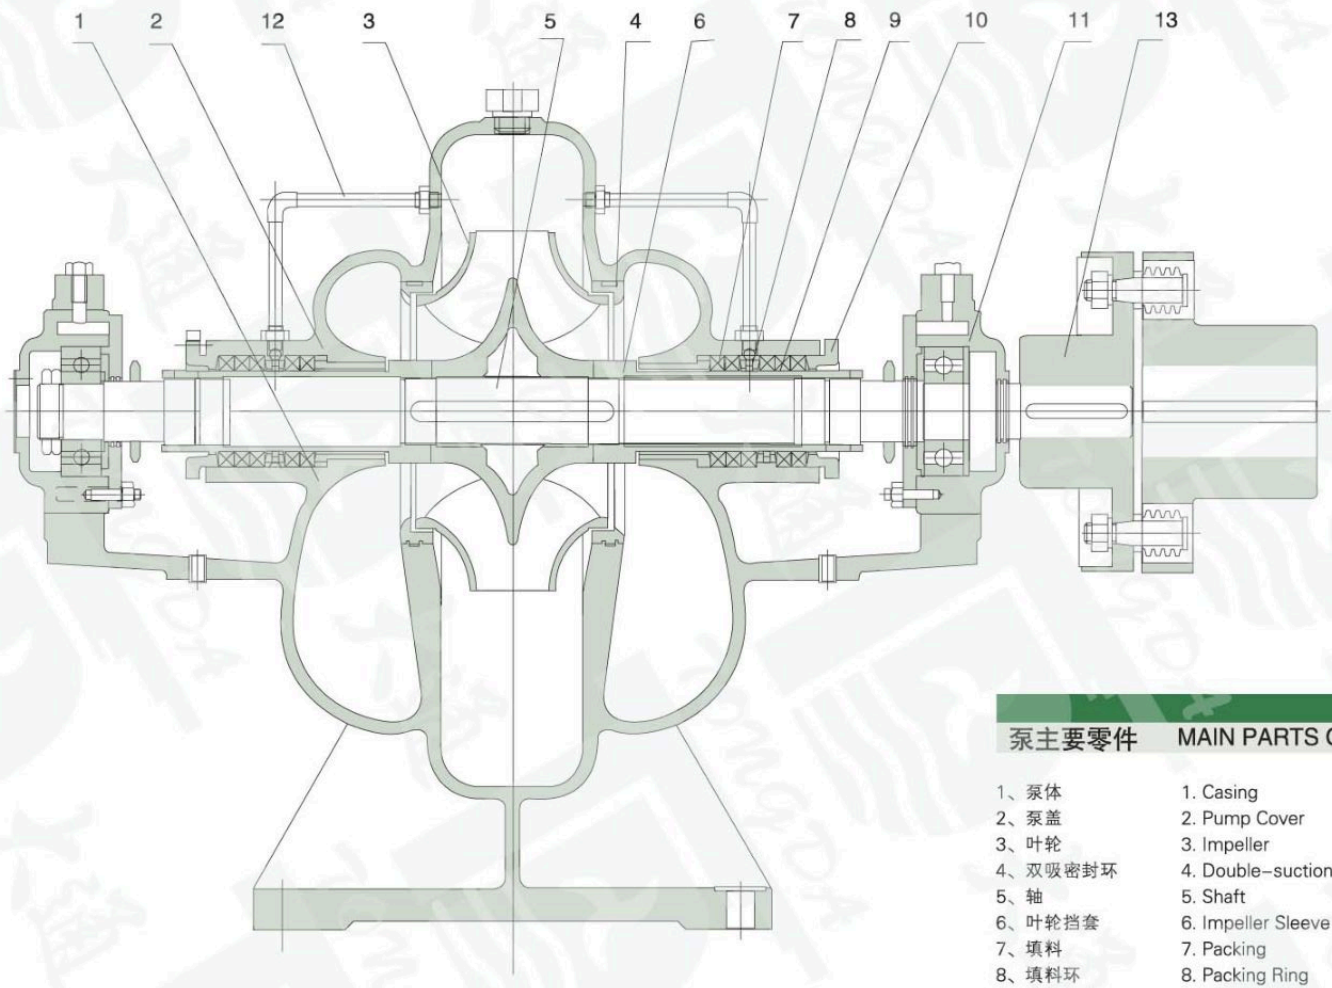

泵主要零件	MAIN PARTS OF PUMP
1、泵体	1. Casing
2、泵盖	2. Pump Cover
3、叶轮	3. Impeller
4、双吸密封环	4. Double-suction Wearing Ring
5、轴	5. Shaft
6、叶轮挡套	6. Impeller Sleeve
7、填料	7. Packing
8、填料环	8. Packing Ring
9、填料轴套	9. Packing Sleeve
10、填料压盖	10. Packing Cover
11、轴承体部件	11. Bearing Support Parts
12、水封管部件	12. Water Seal Pipe Parts
13、联轴器	13. Coupling


S、SM、SY、SF型 泵结构图（吸入口径≥800mm）（结构二）

Sectional Arrangment Figure For Type S、SM、SY、SF Pump(Inlet Dia.≥800mm)(Fig.2)

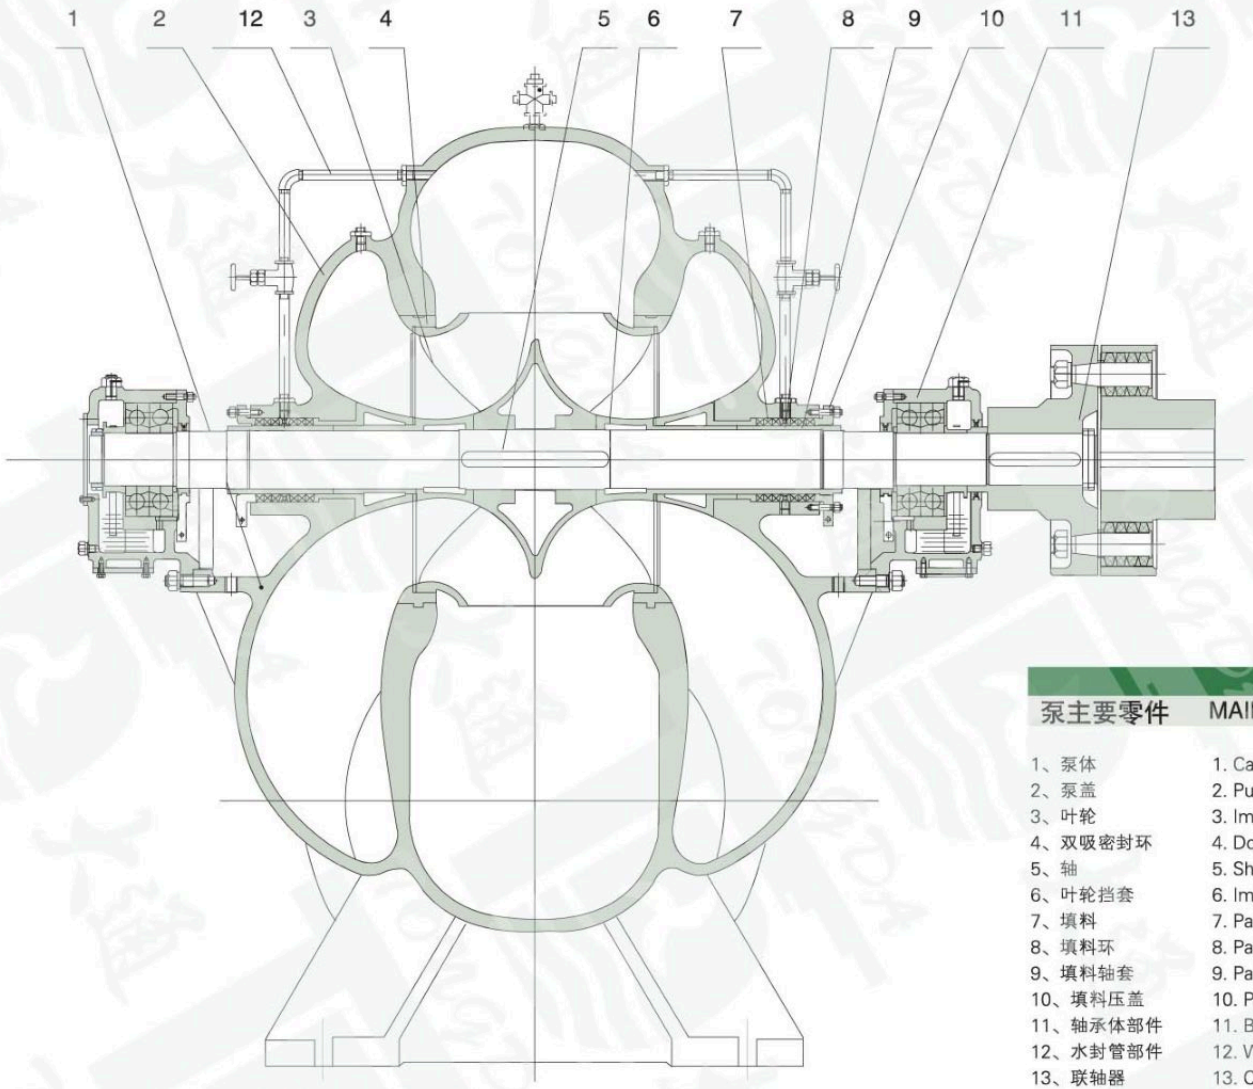

泵主要零件	MAIN PARTS OF PUMP
1、泵体	1. Casing
2、泵盖	2. Pump Cover
3、叶轮	3. Impeller
4、双吸密封环	4. Double-suction Wearing Ring
5、轴	5. Shaft
6、叶轮挡套	6. Impeller Sleeve
7、填料	7. Packing
8、填料环	8. Packing Ring
9、填料轴套	9. Packing Sleeve
10、填料压盖	10. Packing Cover
11、轴承体部件	11. Bearing Support Parts
12、水封管部件	12. Water Seal Pipe Parts
13、联轴器	13. Coupling

S、SM、SY、SF型泵型谱图 Performance Charts

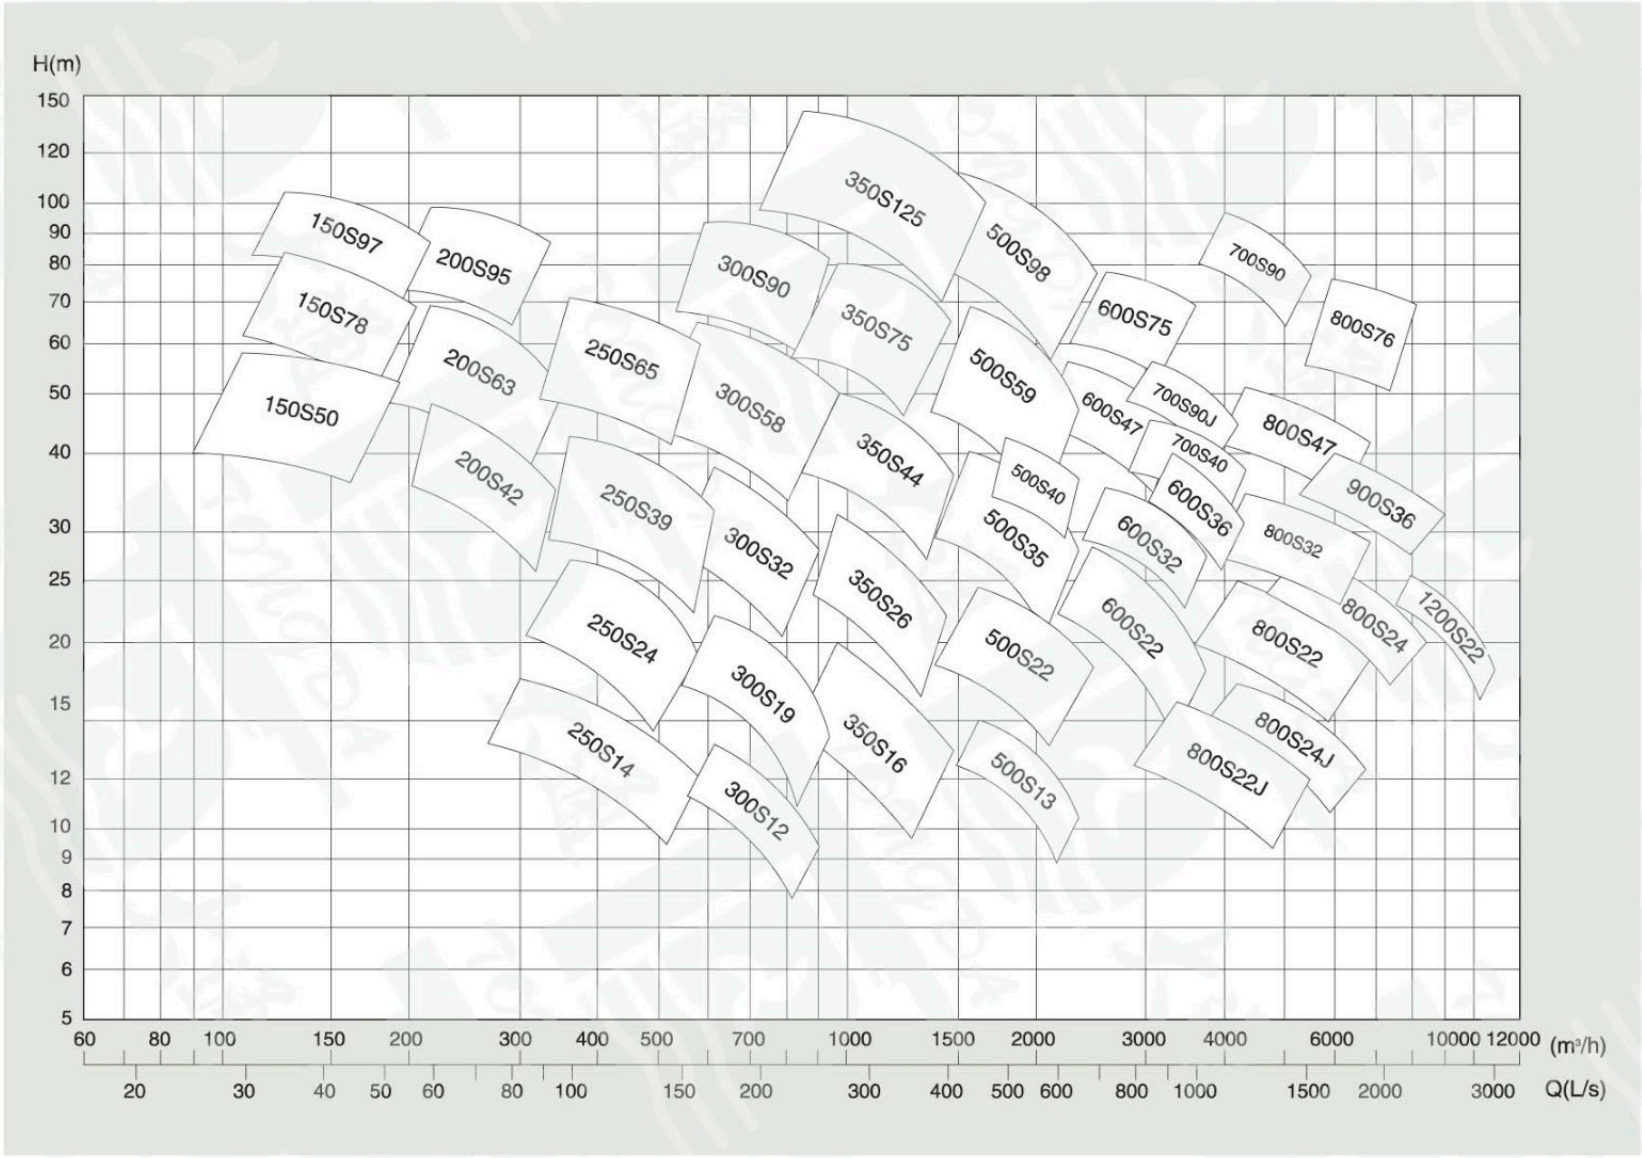

泵性能表 Performance Data Table

型号 Type / 参数 Parameter	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft power Pa	配带电动机 Motor		效率 Eff. η	必需汽蚀余量 (NPSH)r	叶轮名义直径 Impeller Dia.	泵口径		泵重 Weight
						功率 Power	型号 Type				进口 Intet Dia.	出口 Outlet Dia.	
	m^3/h	L/S	m	r/min	kW	kW		%	m	mm	mm	mm	kg
150S50	108	30	58	2980	24.6	37	Y200L$_2$-2	69	2.9	205	150	100	130
	160	44.4	55		30.1			81	3.8				
	193	53.6	52		33.3			82	4.4				
150S50A	108	30	45	2980	18.2	30	Y200L-2	73	2.9	185	150	100	130
	144	40	43		21.1			80	3.6				
	174	48.3	39		23.1			80	4.1				
150S50B	108	30	40	2980	15.9	22	Y180M-2	74	2.7	170	150	100	130
	133	36.9	38		17.7			78	3.1				
	160	44.4	34		19.4			77	3.4				
150S78	126	35	84	2980	40	55	Y250M-2	72	5.9	245	150	100	150
	160	44.5	78		45.3			75					
	198	55	70		51			74					
150S78A	112	31	67	2980	29.6	45	Y225M-2	68	5.9	220	150	100	150
	144	40	62		33.8			72					
	180	50	55		36.9			70					
150S78B	112	31	42	2980	20.5	37	Y200L2-2	68	5.9	190	150	100	150
	144	40	40		22.4			70					
	170	47	37		25.2			68					
150S97	126	35	104	2980	48.8	75	Y280S-2	73	3	270	150	100	150
	180	50	97		59.5			80	3.8				
	216	60	87		64.8			79	5.3				
150S97A	119	33	91	2980	42	75	Y280S-2	70	3	225	150	100	150
	170	47.2	84.5		50.1			78	3.7				
	204	56.6	76		54.8			77	4.7				
150S97J	72	20	24	1480	6.45	11	Y160M-4	73	2.6	270	150	100	150
	90	25	22.5		7.45			74	2.7				
	108	30	20		8.4			70	2.9				
200S42	216	60	48	2980	34.9	55	Y250M-2	81	5.4	204	200	150	200
	280	78	42		37.7			85					
	342	95	35		40.2			81					
200S42A	198	55	43	2980	30.5	37	Y200L2-2	76	5.4	193	200	150	200
	270	75	36		33.1			80					
	310	86	31		34.4			76					
200S63	216	60	69	2980	55.1	75	Y280S-2	73.7	5.4	235	200	150	230
	280	78	63		59.3			81					
	351	97.5	50		67.8			70.5					
200S63A	180	50	54.5	2980	38.2	55	Y250M-2	70	5.4	215	200	150	230
	270	75	46		42.8			79					
	324	90	37.5		47.3			70					
200S63B	173	48	48	2980	32.2	45	Y225M-2	70	5.4	200	200	150	230
	239	66	44		36.6			78					
	288	80	36		38.2			74					
200S95	216	60	99	2980	78.6	110	Y315S-2	74	4	272	200	125	309
	280	77.8	95		90.8			80	4.7				
	336	93.3	87		101.1			79	6.6				
200S95A	210	58.3	87	2980	68.1	110	Y315S-2	73	4	255	200	125	309
	262	72.8	83		76.9			77	4.5				
	314	87.2	74		83.3			76	5.7				

泵性能表 Performance Data Table

型号 Type / 参数 Parameter	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft power Pa	配带电动机 Motor 功率 Power	配带电动机 Motor 型号 Type	效率 Eff. η	必需汽蚀余量 (NPSH)r	叶轮名义直径 Impeller Dia.	泵口径 进口 Intet Dia.	泵口径 出口 Outlet Dia.	泵重 Weight
	m^3/h	L/S	m	r/min	kW	kW		%	m	mm	mm	mm	kg
	196	54.4	76		57			72	4				
200S95B	247	68.6	73	2980	64.6	75	Y280S-2	76	4.2	245	200	125	309
	300	83.3	63		71.4			72	5.4				
	300	83	17.5		19.7			72.5	2				
250S14	485	134.7	14	1480	22.6	30	Y200L-4	85.6	3.39	245	250	200	520
	580	161	12		23.3			82.7	4.18				
	320	88.8	13.7		15.3			78					
250S14A	430	119.4	11	1480	15.7	22	Y180L-4	82	3.2	226	250	200	520
	504	140	8.6		15.73			75					
	360	100	27		33.1			80					
250S24	485	134.7	24	1480	36.9	45	Y225M-4	86	3.5	285	250	200	580
	576	160	19		36.3			82					
	342	95	22.2		25.8			80					
250S24A	414	115	20.3	1480	27.6	37	Y225S-4	83	3.5	265	250	200	580
	482	134	17.4		28.6			80					
	360	80.8	42.5		54.8			76					
250S39	485	134.7	39	1480	62.1	75	Y280S-4	83	3.2	367	250	200	620
	612	170	32.5		68.6			79					
	324	90	35.5		42.3			74					
250S39A	468	130	30.5	1480	49.2	55	Y250M-4	79	3.2	338	250	200	620
	576	160	25		50.9			77					
	360	80.8	71		92.9			75					
250S65	485	134.7	65	1480	108.7	132	Y315M-4	79	3	450	250	150	831
	582	162	60		126.9			75					
	338	93.8	60		74.7			74					
250S65A	462	128.3	53	1480	86.6	110	Y315S-4	77	3	410	250	150	831
	535	148.6	49		95.2			75					
	612	170	13.6		30.2			78					
300S12	790	219	11.25	1480	31.1	37	Y225S-4	83	5.8	251	300	300	720
	900	250	9.4		33.1			80					
	515	143.1	11.5		22.1			73					
300S12A	675	187.5	9.7	1480	22.9	30	Y200L-4	78	5.8	222	300	300	720
	781	216.9	8.5		23.8			76					
	612	170	22		45.9			80					
300S19	790	219	19	1480	46.9	55	Y250M-4	87	5.8	290	300	250	760
	935	260	14		47.6			75					
	485	134.7	18.5		34.4			71					
300S19A	693	192.5	14.8	1480	34.9	45	Y225M-4	80	5.8	260	300	250	760
	798	221.7	12.1		35.1			75					
	612	170	38		76.2			83					
300S32	790	219	32	1480	79	110	Y315S-4	87	5.8	348	300	250	810
	900	250	28		86			80					
	537	149.2	29.5		53.9			80					
300S32A	702	195	24.7	1480	56.2	75	Y280S-4	84	5.8	318	300	250	810
	790	219.4	22.8		62.9			78					
	576	160	65		136			75					
300S58	790	219	58	1480	148.5	185	Y315M1-4	84	5.8	435	300	250	943
	972	270	50		165.5			80					

泵性能表 Performance Data Table

参数 Parameter / 型号 Type	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft power Pa	配带电动机 Motor		效率 Eff. η	必需汽蚀余量 (NPSH)r	叶轮名义直径 Impeller Dia.	泵口径		泵重 Weight
						功率 Power	型号 Type				进口 Intet Dia.	出口 Outlet Dia.	
	m^3/h	L/S	m	r/min	kW	kW		%	m	mm	mm	mm	kg
300S58A	529	147	55	1480	107	160	Y315L1-4	74	5.8	410	300	250	943
	720	200	49		118.6			81					
	893	248	42		131			78					
300S58B	504	140	47.2	1480	88.8	132	Y315M-4	73	5.8	390	300	250	943
	684	190	43		100			80					
	835	232	37		108			78					
300S90	590	164	93	1480	202	315	Y355L2-4	74	5.8	531	300	200	1056
	790	219	90		242			80					
	936	260	82		279			75					
300S90A	576	160	86	1480	190	280	Y355L1-4	71	5.8	500	300	200	1056
	756	210	78		217			74					
	918	255	70		247			71					
300S90B	540	150	72	1480	151	220	Y355M1-4	70	5.8	470	300	200	1056
	720	200	67		180			73					
	900	250	57		200			70					
350S16	972	270	20	1480	63.8	75	Y280-4	83	5.3	290	350	350	895
	1260	350	16		63.9			86					
	1476	400	13.4		72.8			74					
350S16A	800	222.2	13.7	1480	40.3	55	Y250M-4	74	5.3	250	350	350	895
	967	268.6	11.5		38.8			78					
	1167	324.2	8.6		39			70					
350S26	972	270	32	1480	99.7	132	Y315M-4	85	5.3	340	350	300	875
	1260	350	26		101.5			88					
	1440	400	22		105			82					
350S26A	843	234.2	24.7	1480	70.9	90	Y280M-4	80	5.3	315	350	300	875
	1088	302.2	20.4		72.8			83					
	1264	351.1	15.7		74			73					
350S44	972	270	50	1480	164	220	Y355M1-4	81	5.3	406	350	300	1120
	1260	350	44		177.6			87					
	1476	410	37		189			79					
350S44A	876	243.3	42	1480	125.2	160	Y315L1-4	80	5.3	367	350	300	1120
	1131	314.2	37		135.8			84					
	1350	375	31		142.6			80					
350S75	972	270	80	1480	271	355	Y4501-4	78	5.3	493	350	250	1120
	1260	350	75		303			85					
	1440	400	65		319			80					
350S75A	900	250	70	1480	220	280	Y355L1-4	78	5.3	470	350	250	1120
	1170	325	65		247			84					
	1332	370	56		257			79					
350S75B	813	226	57	1480	168	220	Y355M1-4	75	5.3	435	350	250	1120
	1060	294	53		187			82					
	1202	334	45.8		195			77					
350S125	850	236	140	1480	463	710	Y5001-4	70	5.3	655	350	200	1420
	1260	350	125		530			81					
	1660	461	100		624			72.5					
350S125A	787	219	120	1480	367	560	Y4505-4	70	5.3	620	350	200	1420
	1157	321	107		432			78					
	1538	427.2	86		515			70					

泵性能表 Performance Data Table

参数 Parameter / 型号 Type	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft power Pa	配带电动机 Motor		效率 Eff. η	必需汽蚀余量 (NPSH)r	叶轮名义直径 Impeller Dia.	泵口径		泵重 Weight
						功率 Power	型号 Type				进口 Intet Dia.	出口 Outlet Dia.	
	m^3/h	L/S	m	r/min	kW	kW		%	m	mm	mm	mm	kg
350S125B	754	209.4	108	1280	313	500	Y4504–4	70	5.3	575	350	200	1420
	1098	305	96		373			77					
	1448	402.2	77		419			72.5					
500S13	1620	450	15	980	83.8	110	Y315L$_1$–6	79	4.5	390	500	500	1780
	2020	561.1	13		86.2			83	4.7				
	2340	650	10.4		82.8			80	5				
500S13A	1490	413.9	12.8	980	66.8	75	Y315S–6	77.8	4.5	360	500	500	1780
	1860	516.7	11		68			82	4.7				
	2100	583.3	9		65.5			78.6	5				
500S22	1620	450	24.5	980	140.4	185	Y355M$_2$–6	77	5.2	465	500	400	1850
	2020	561.1	22		144.1			84					
	2340	650	19.4		145.4			85					
500S22A	1400	388.9	20	980	103	132	Y315L$_2$–6	74	5.2	427	500	400	1850
	1746	485	17		101			80					
	2020	561.1	14		93.8			82.1					
500S35	1620	450	40	980	207.6	250	Y450–6	85	4.8	530	500	350	2200
	2020	561	35		219			88					
	2340	650	28		210			85					
500S35A	1400	389	31	980	144	220	Y355L$_1$–6	82	4.8	498	500	350	2200
	1746	485	27		151			85					
	2020	561	21		138			84					
500S40	1788	496.7	42.5	980	234.8	280	Y4002–6	88.2	3	566	500	350	2400
	2020	561.1	40.3		245.1			90.5	3.2				
	2314	642.8	36.4		251.9			91.1	4.1				
500S40A	1676	465.6	37.9	980	198.7	250	Y3556–6	87.1	3	535	500	350	2400
	1969	546.9	35		211			89	3.2				
	2262	628.3	31.2		223.6			86	4.1				
500S59	1620	450	68	980	380	450	Y4506–6	79	4.5	675	500	350	2650
	2020	561	59		391			83					
	2340	650	47		374			80					
500S59A	1500	417	57	980	315	400	Y4505–6	74	4.5	625	500	350	2650
	1872	520	49		330			75					
	2170	603	39		320			72					
500S59B	1400	389	46	980	240	315	Y4503–6	73	4.5	583	500	350	2650
	1746	485	40		257			74					
	2020	561	32		248			71					
500S98	1620	450	114	980	644.8	800	Y5005–6	78	4	860	500	300	3800
	2020	561.1	98		678			79.4					
	2340	650	79		680.3			74					
500S98A	1500	416.7	96	980	509.3	630	Y5003–6	77	4	800	500	300	3800
	1872	520	83		540			78.5					
	2170	602.8	67		542.4			73					

泵性能表 Performance Data Table

参数 Parameter / 型号 Type	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft power Pa	配带电动机 Motor 功率 Power	配带电动机 Motor 型号 Type	效率 Eff. η	必需汽蚀余量 (NPSH)r	叶轮名义直径 Impeller Dia.	泵口径 进口 Intet Dia.	泵口径 出口 Outlet Dia.	泵重 Weight
	m^3/h	L/S	m	r/min	kW	kW		%	m	mm	mm	mm	kg
500S98B	1400	388.9	86	980	431.4	560	Y5002-6	76	4	745	500	300	3600
	1746	485	74		452			78					
	2020	561	59		432.8			75					
600S22	2593	720.3	27.6	980	226.8	280	Y450-6	86	7	485	600	500	2200
	3241	900.3	23.1		231.8			88					
	3739	1038.6	18		232.1			79					
600S22A	2288	635.6	21.5	980	157.5	185	Y355M2-6	85	7	445	600	500	2200
	2860	794.4	18		161			87					
	3300	916.7	14		161.2			78					
600S32	2700	750	33.5	980	291.7	400	Y4505-6	85	6.4	540	600	500	3000
	3240	900	32		317.5			89					
	3600	1000	26		298			84					
600S32A	2520	700	25.5	980	205.8	250	Y450-6	85	6.4	490	600	500	3000
	3000	833.3	23		211			89					
	3165	879.2	19.2		196.9			84					
600S36	3300	916.7	40	980	413.4	500	Y5001-6	87	8.2	570	600	500	2400
	3800	1055.6	36		423.6			88	8.4				
	4300	1194.4	31		427.3			85	8.8				
600S47	2160	600	56.5	980	415.4	560	Y5002-6	80	5.5	636	600	400	4364
	3170	880.6	47		455.9			88	6.5				
	3600	1000	40.5		461.7			86	8				
600S47A	2400	666.7	45	980	352.5	450	Y4506-6	83.5	5.5	587	600	400	4364
	2920	811.1	42		380			88	6.5				
	3500	972.2	35		402.2			83	8				
600S75	2592	720	78	980	644.3	900	Y5601-6	87	5.6	765	600	400	4350
	3060	850	75		694.4			88	5.6				
	3600	1000	69		760			80	10.1				
600S75A	2338	500	63.5	980	467	630	Y5003-6	85.5	4.6	690	600	400	4350
	3084	856.7	57.8		539.7			90	7.3				
	3248	900	56.2		552			89	8.2				
700S40	3040	844.4	45.2	742	443.1	560	Y5006-8	84.5	3.3	778	700	500	6450
	3800	1055.6	41.9		485.3			89.4	3.6				
	4340	1205.6	37.7		501			89	5				
700S40A	2837	788.1	39.6	742	368.4	500	Y5005-8	83.1	3.3	756	700	500	6450
	3800	1055.6	34.7		405.6			88.6	3.6				
	4583	1273.1	27.7		412.3			83.9	5				
700S90	4000	1111.1	97	980	1201	1600	Y6302-6	88	5.8	840	700	500	6000
	4700	1305.6	90		1281			90	7.4				
	5500	1527.8	77		1358			85	9.5				
700S90J	3000	833.3	56	742	532	630	Y5601-8	86	3.6	840	700	500	6000
	3600	1000	52		579			88	4.6				
	4200	1166.7	44		592			83	5.9				

泵性能表 Performance Data Table

型号 Type / 参数 Parameter	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft power Pa	配带电动机 Motor 功率 Power	配带电动机 Motor 型号 Type	效率 Eff. η	必需汽蚀余量 (NPSH)r	叶轮名义直径 Impeller Dia.	泵口径 进口 Intet Dia.	泵口径 出口 Outlet Dia.	泵重 Weight
	m^3/h	L/S	m	r/min	kW	kW		%	m	mm	mm	mm	kg
800S22	4320	1200	25	742	358.7	450	Y5004-8	82	7	640	800	700	5400
	5500	1527.8	22		370.2			89					
	6840	1800	19		385.4			86					
800S22J	3000	833.3	16	590	163.4	250	Y500-10	80	5	640	800	700	5400
	4400	1222	14		190.6			88					
	5040	1400	12.5		201.8			85					
800S22A	3960	1100	19	742	246.9	315	Y5001-8	83	7	570	800	700	5400
	4830	1341.7	17		254.1			88					
	5500	1527.8	15		261.2			86					
800S22JA	2800	777.8	13	590	123.9	185	Y355L-10	80	5	570	800	700	5400
	3870	1070	11		133.3			87					
	4500	1250	9.5		138.6			84					
800S24	5250	1458.3	27.5	742	479	630	Y5601-8	82	9	658	800	700	5600
	7000	1944.4	24		506			90					
	8400	2333.3	20		532			86					
800S24J	4170	1158.3	17.4	590	244	315	Y5004-10	81	6	658	800	700	5600
	5600	1555.6	15		260			88					
	6700	1861.1	12.5		272			84					
800S24A	4840	1344.4	23.6	742	382	500	Y5005-8	81.5	9	610	800	700	5600
	6250	1736.1	21		406			88					
	7740	2150	17.2		429			84.5					
800S24JA	3850	1069.4	15	590	194	280	Y5003-10	81	6	610	800	700	5600
	5000	1388.9	13		203			87					
	6150	1708.3	11		219			84					
800S32	4320	1200	35	742	502.2	630	Y5601-8	82	7	710	800	600	5400
	5500	1527.8	32		538.5			89					
	6480	1800	29		588.2			87					
800S32A	3500	972	30	742	353	450	Y5004-8	81	7	645	800	600	5400
	4950	1357	26		398.3			88					
	6000	1666.7	23		437			86					
800S47	4320	1200	51	742	740.7	1000	Y6301-8	81	6.5	820	800	600	6800
	5500	1527.8	47		782.2			90					
	6480	1800	42		842.2			88					
800S47J	3000	833.3	35	590	357.4	450	Y5601-10	80	4	820	800	600	6800
	4400	1222	30		403.9			89					
	5200	1444	26		428.1			86					
800S47A	3500	972	45	742	529.5	710	Y5602-8	81	6.5	760	800	600	6800
	5070	1408	40		620.5			89					
	6000	1666.7	36		684			86					
800S47JA	2800	777.8	30	590	286	355	Y5005-10	80	4	760	800	600	6800
	4060	1127.8	25		314.1			88					
	4800	1333	22		334.4			86					


泵性能表 Performance Data Table


参数 Parameter / 型号 Type	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft power Pa	配带电动机 Motor		效率 Eff. η	必需汽蚀余量 (NPSH)r	叶轮名义直径 Impeller Dia.	泵口径		泵重 Weight
						功率 Power	型号 Type				进口 Intet Dia.	出口 Outlet Dia.	
	m^3/h	L/S	m	r/min	kW	kW		%	m	mm	mm	mm	kg
	5920	1644.4	76		1426			86	5.8				
800S76	7360	2044.4	72	742	1570	1800	Y710-7-8	92	6.4	990	800	600	7500
	8075	2243	69		1706			89	8.5				
	4750	1319.4	48		734			84.7	3.6				
800S76J	5890	1636.1	45.5	590	807	1000	Y6303-10	90.5	4.5	990	800	600	7500
	6365	1768	43.5		857			88	5.3				
	4750	1319.4	61		929			85	5.8				
800S76A	6080	1688.9	58	742	1056	1250	Y6303-8	91	6.4	885	800	600	7500
	6745	1873.6	55		1162			87	8.5				
	3895	1081.9	38.5		488			83.7	3.6				
800S76JA	4980	1383.3	36.5	590	553	710	Y5605-10	89.6	4.5	885	800	600	7500
	5510	1530.6	34.8		610			85.7	5.3				
	4370	1213.9	55		777			84.3	5.8				
800S76B	5550	1541.7	52.3	742	876	1120	Y6302-8	90.3	6.4	840	800	600	7500
	6175	1715.2	49.5		965			86.3	8.5				
	3560	988.9	34.7		406			83	3.6				
800S76JB	4410	1225	33	590	448	560	Y5603-10	88.5	4.5	840	800	600	7500
	4900	1361.1	31.3		486			86	5.3				
	3990	1108.3	33.7		441			83	3.2				
800S76JJ	4940	1372.2	32	495	490	630	Y6302-12	88	3.4	990	800	600	7500
	5320	1477.8	30.7		530			84	4.7				
	6000	1666.7	40		769.4			85	5.3				
900S36	7500	2083.3	36	590	817.5	1000	Y6303-10	90	6.2	980	900	900	11200
	9000	2500	32		907.3			86.5	7.3				
	5700	1583.3	34.3		622.4			85.6	4				
900S36A	6600	1833.3	32	590	654	800	Y6301-10	88	4.5	905	900	900	11200
	7900	2194.4	27.5		687.6			86.1	5.3				
	7080	1966.7	38		843			87	4.7				
900S36I	8140	2261.1	36	590	897	1000	Y6303-10	89	5.1	910	900	900	11200
	9330	2591.7	31		927			85	6.3				
	7920	2200	25.5		644			85.5					
1200S22	9612	2670	22	495	662	800	Y6304-12	87	5.8	955	1200	800	16000
	10800	3000	18		638			83					
	7200	2000	22.5		534			83.8					
1200S22A	9000	2500	20.2	495	573	710	Y6303-12	86.5	5.8	910	1200	800	16000
	10080	2800	17.5		585			82.2					
	10370	2881	29		976		Y1250-	84					
1200S24	14180	3939	24	495	1054	1250	12/1730	88	7.5		1200	1000	17000
	17290	4803	20		1109			85					
	10800	3000	32		1121		Y1600-	84					
1200S24I	14760	4100	26	495	1188	1600	12/1730	88	7.5		1200	1000	17000
	18000	5000	22		1270			85					


泵 性 能 表 Performance Data Table


参数 Parameter / 型号 Type	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft power Pa	配带电动机 Motor		效率 Eff. η	必需汽蚀余量 (NPSH)r	叶轮名义直径 Impeller Dia.	泵口径		泵重 Weight
						功率 Power	型号 Type				进口 Intet Dia.	出口 Outlet Dia.	
	m^3/h	L/S	m	r/min	kW	kW		%	m	mm	mm	mm	kg
1200S56	9000	2500	62	595	1830	2500	Y2500–10/1730	83	8.5		1200	800	21000
	11520	3200	56		1988			88					
	12960	3600	48		2016			84					
1200S56A	8280	2300	56	595	1578	2000	Y2000–10/1730	80	8.5		1200	800	21000
	10665	2962	48		1641			85					
	11988	3330	43		1671			84					
1400S24	14400	4000	26	370	1200	1600	Y1600–16/1730	85	9.0		1400	1400	28000
	18000	5000	24		1337			88					
	21600	6000	21		1437			86					
1400S24A	12800	3556	22	370	925	1250	Y1250–16/1730	83	9.0		1400	1400	28000
	16300	4528	20		1033			86					
	19600	5444	17		1081			84					


性 能 曲 线 Performance Curve

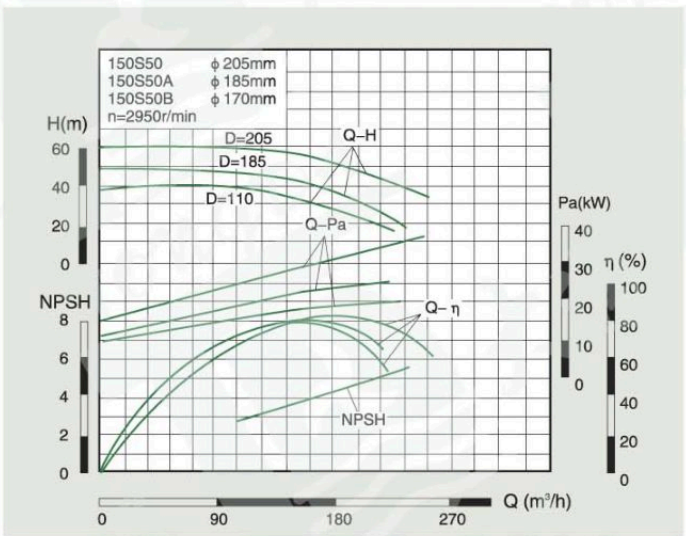


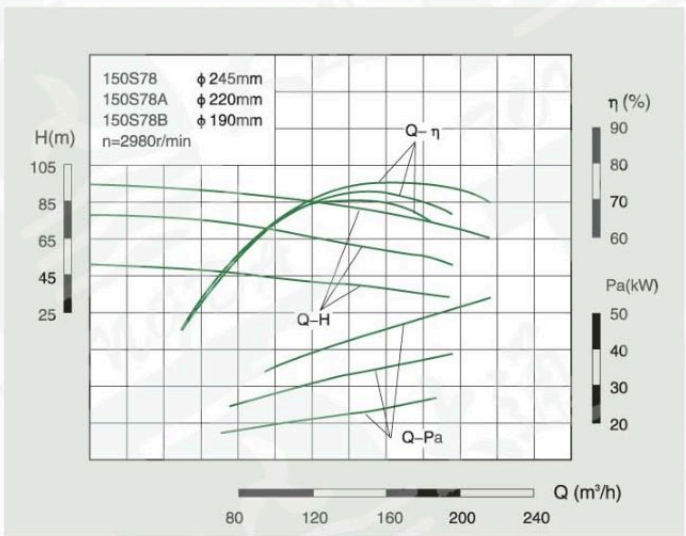

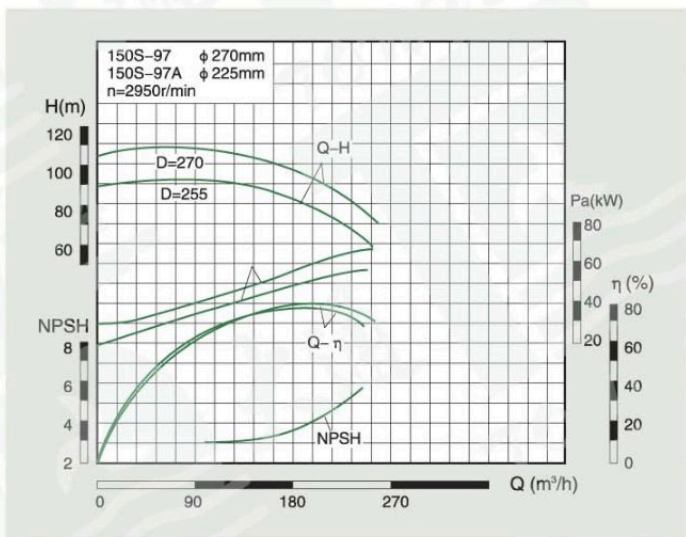


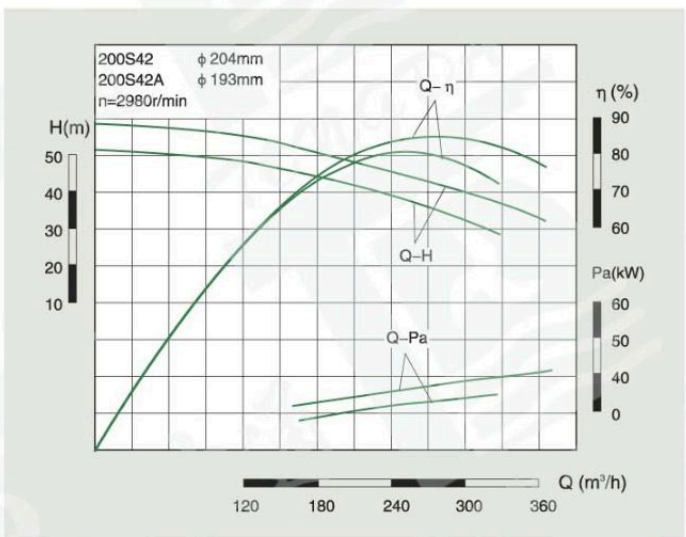


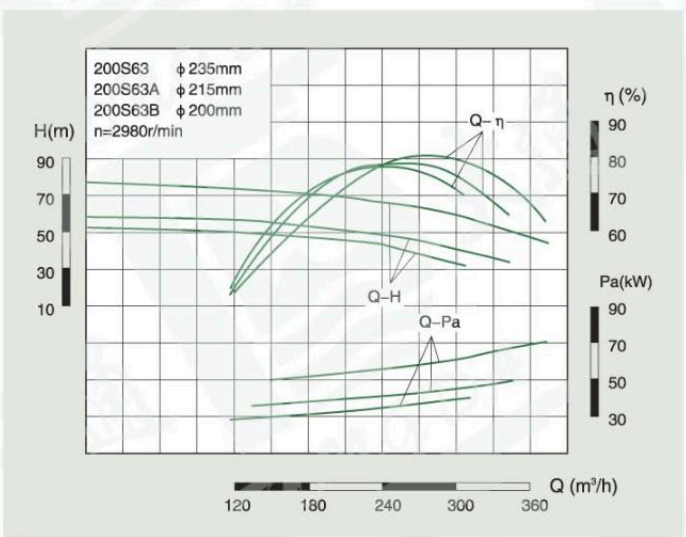


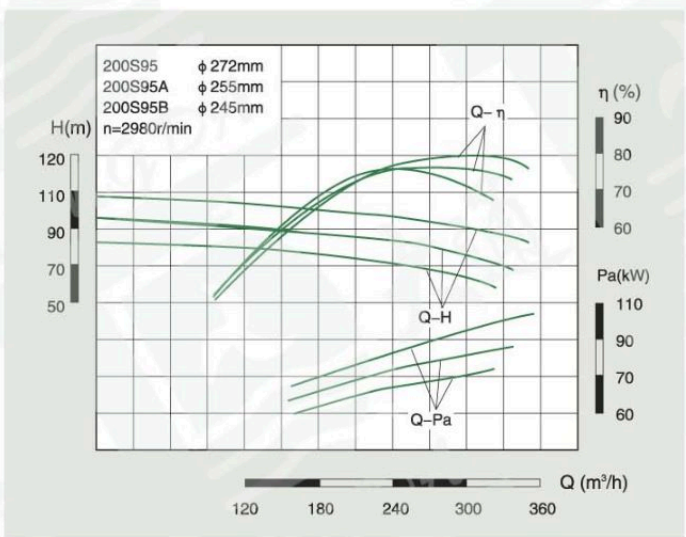



性 能 曲 线 Performance Curve

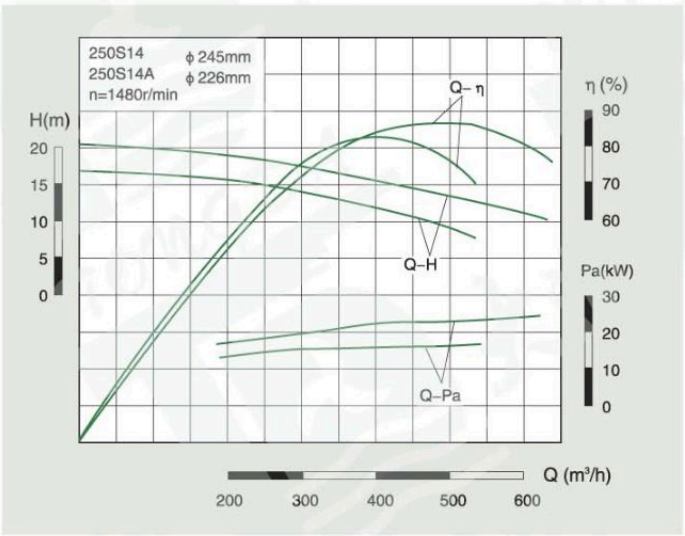


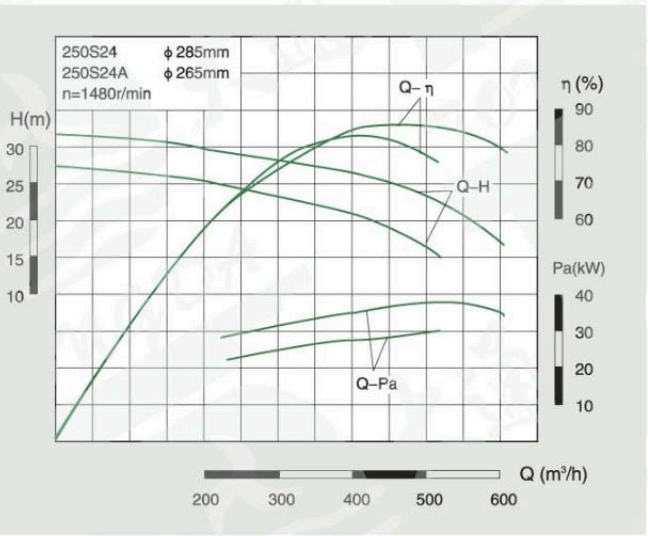

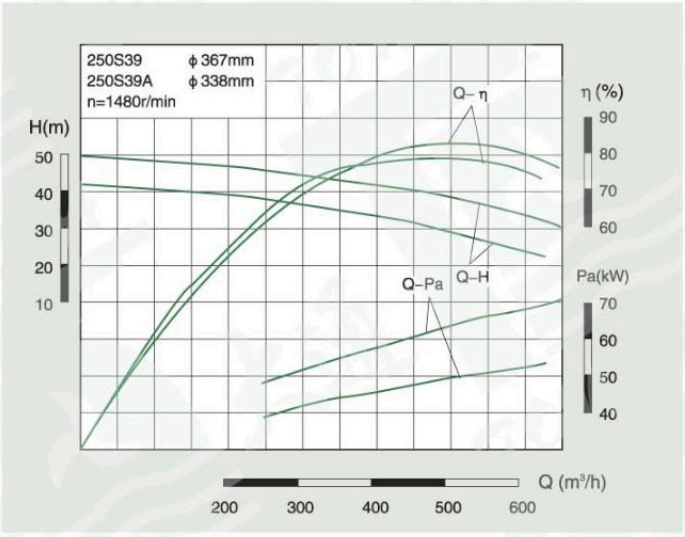


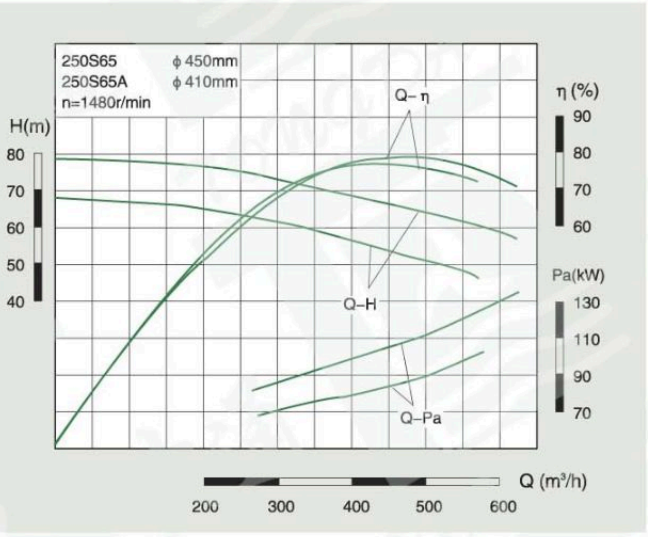


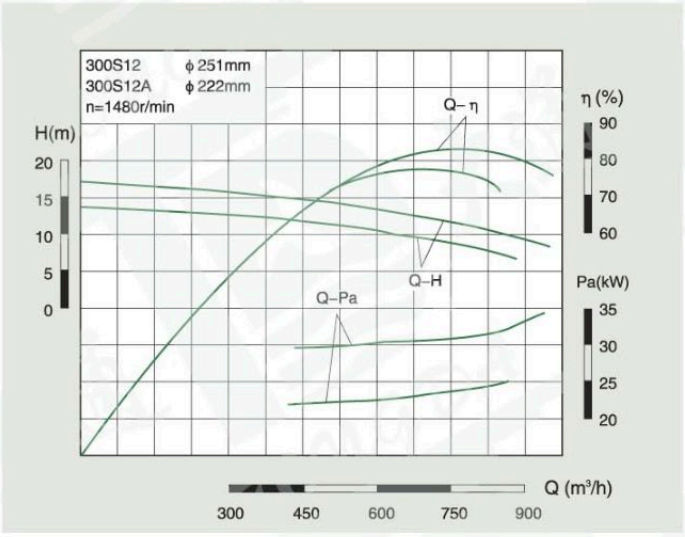


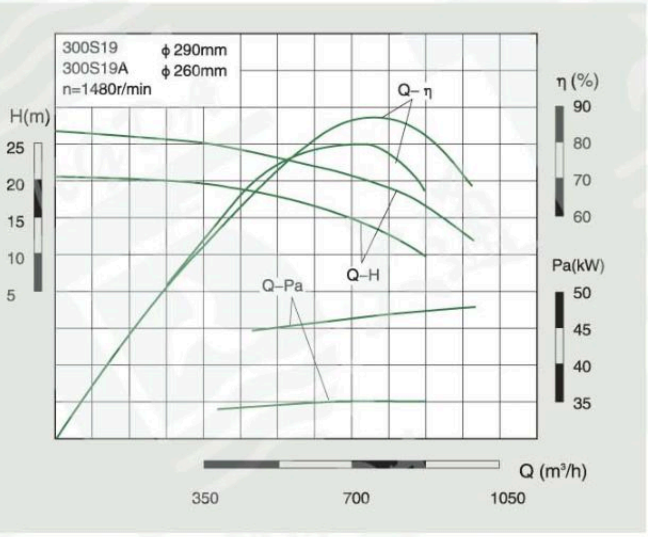



性 能 曲 线 Performance Curve

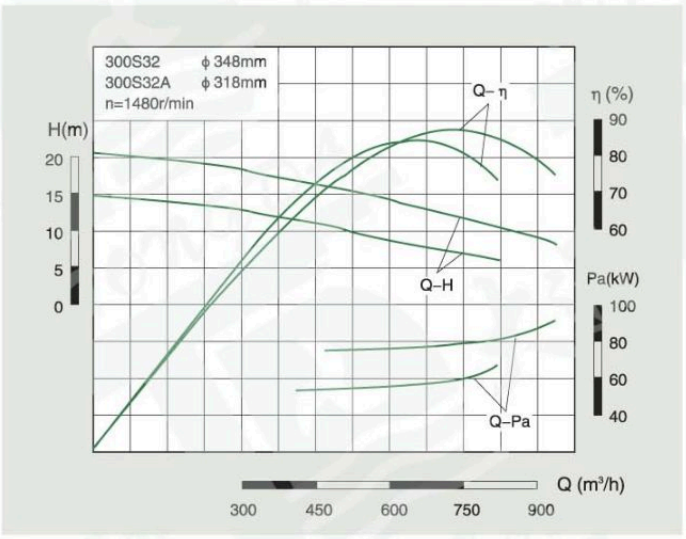


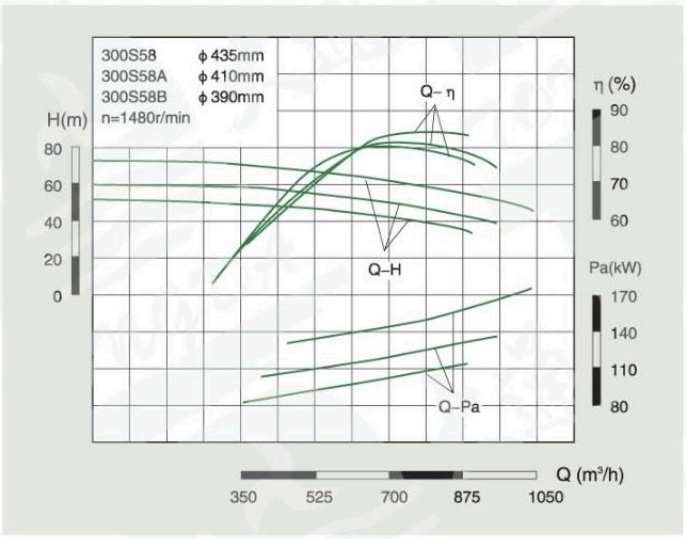

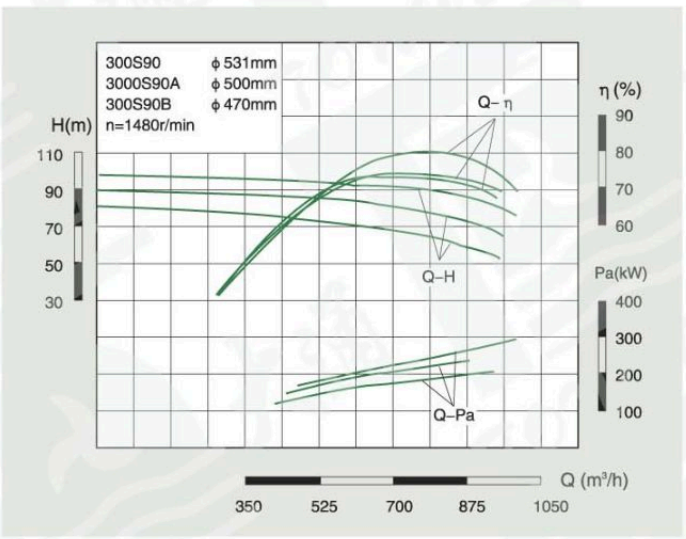


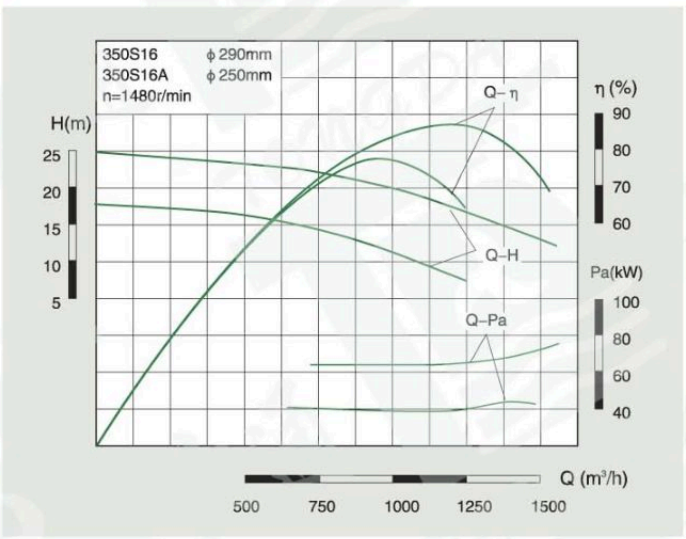


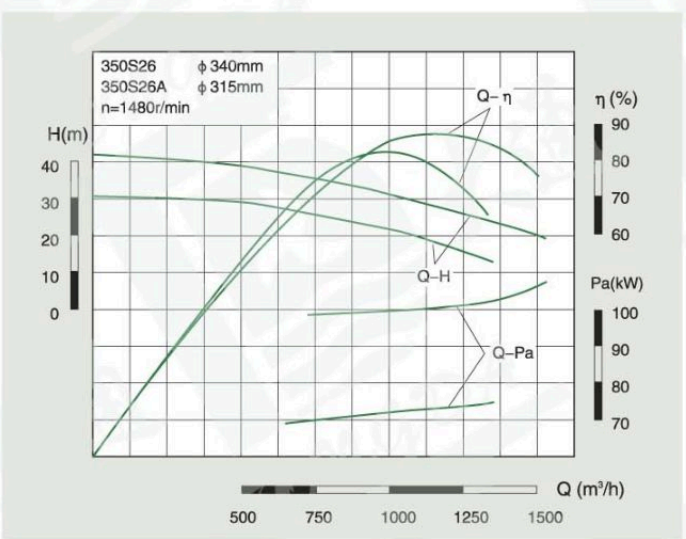


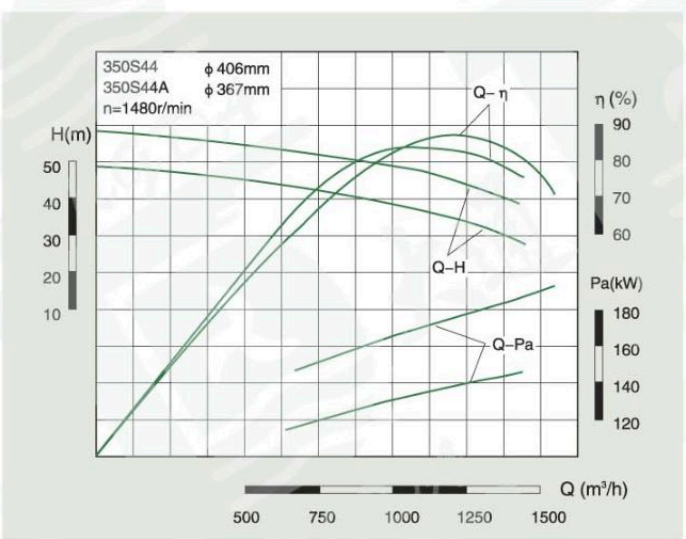



性 能 曲 线 Performance Curve

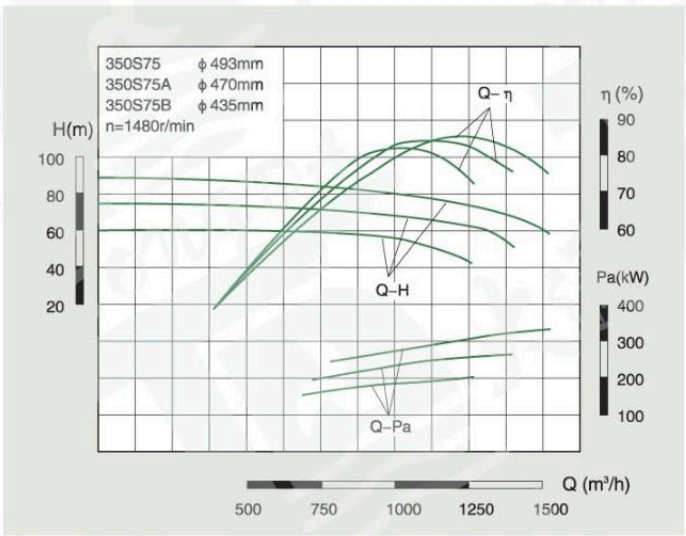


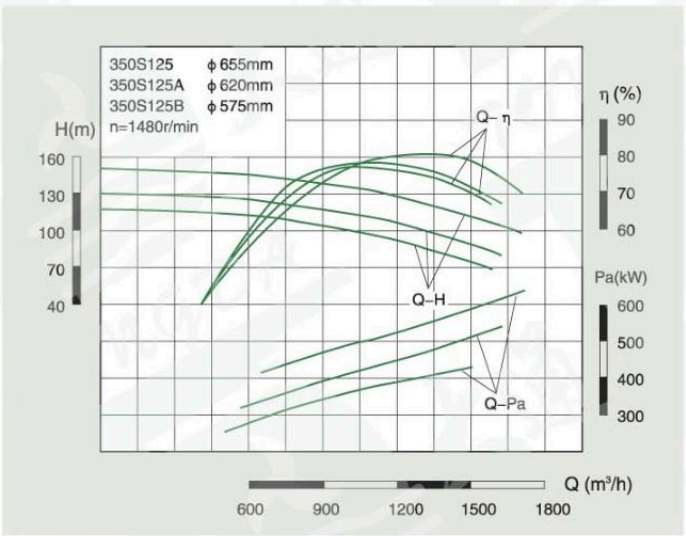

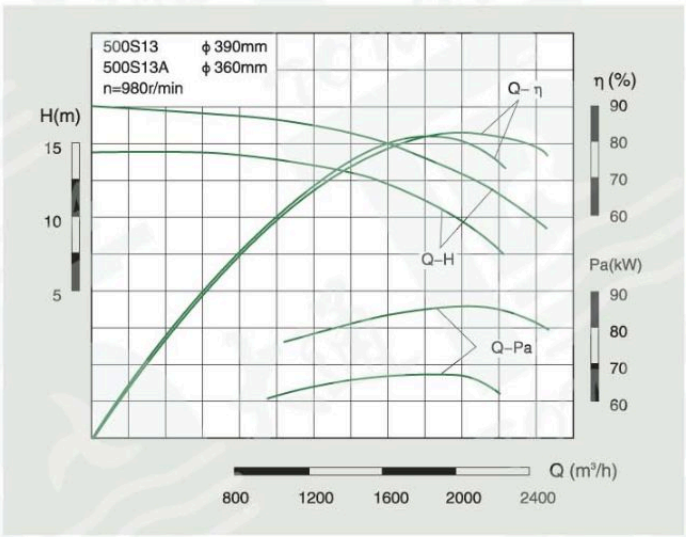


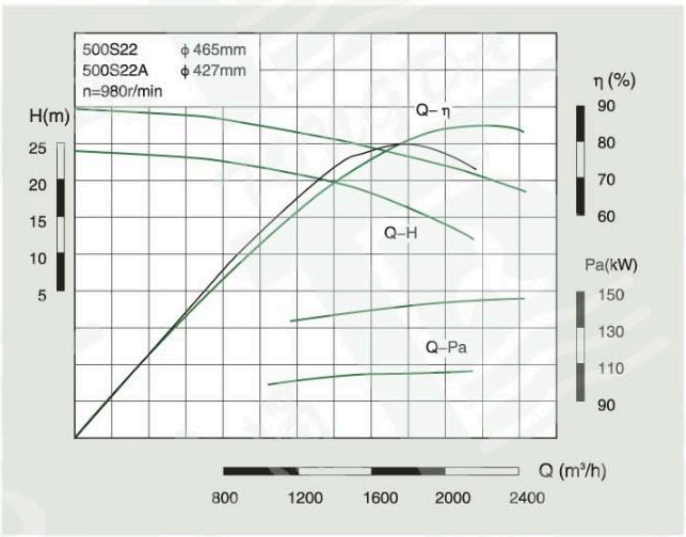


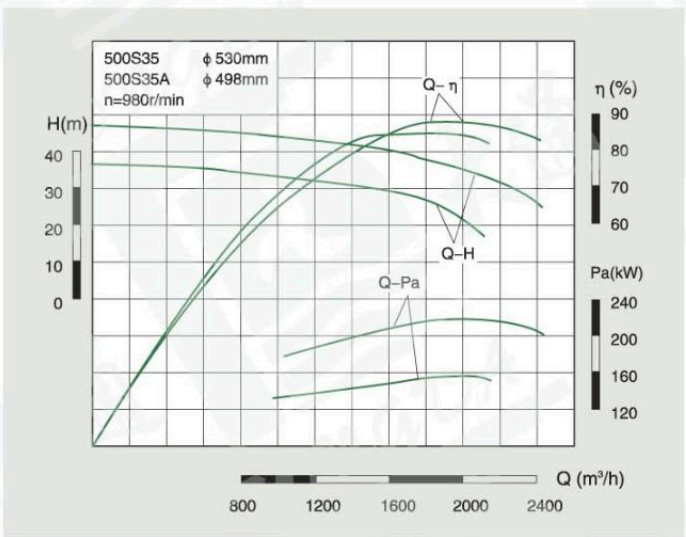


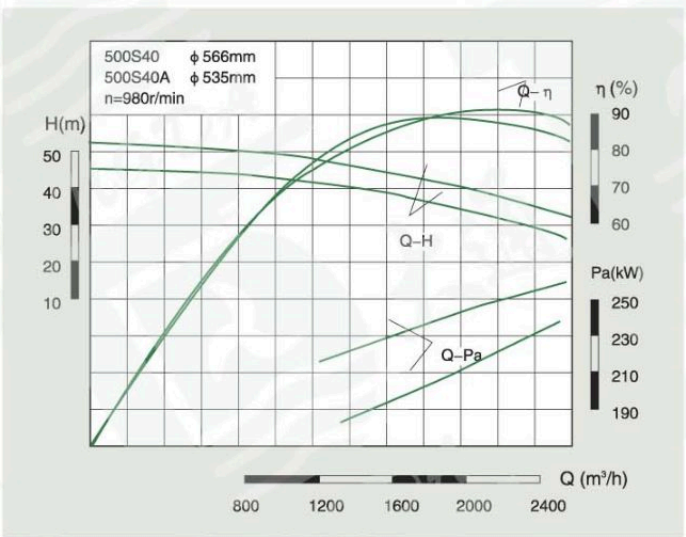



性 能 曲 线 Performance Curve

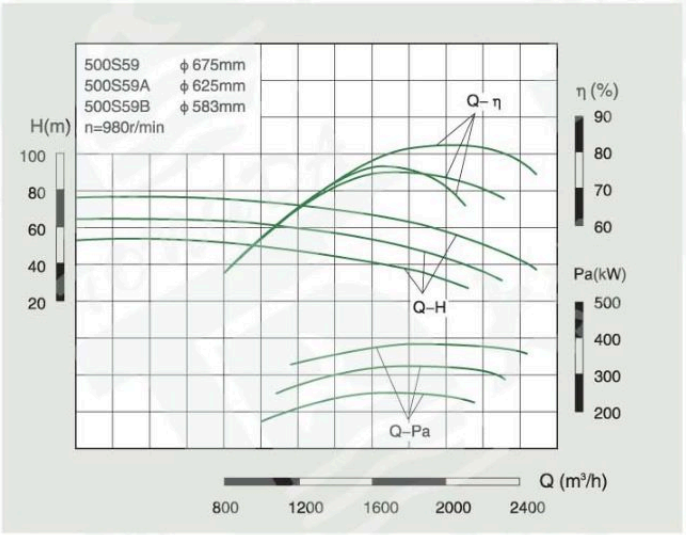


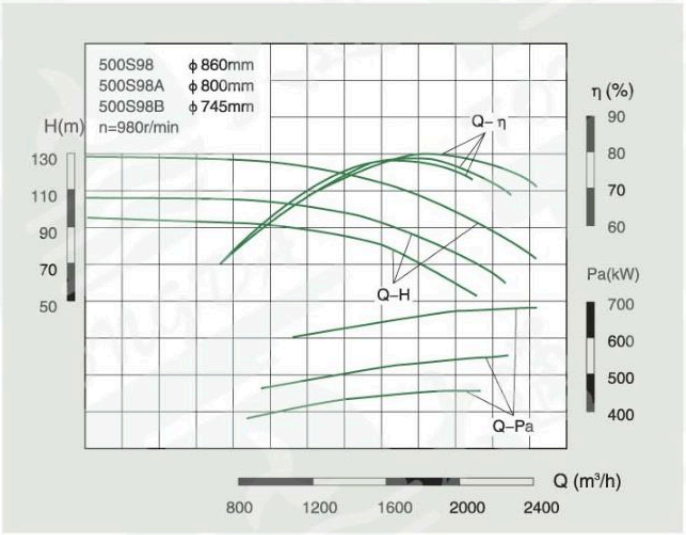

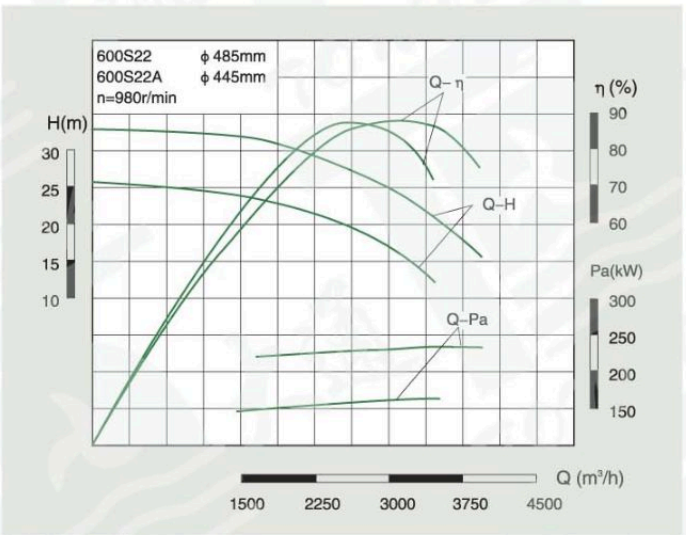


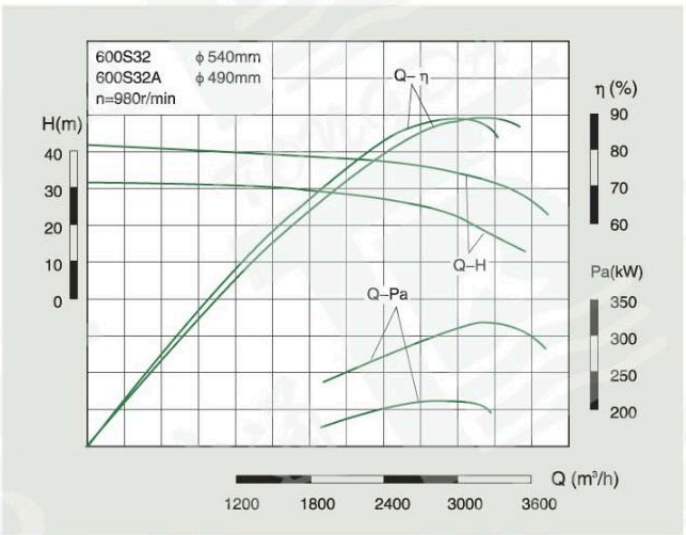


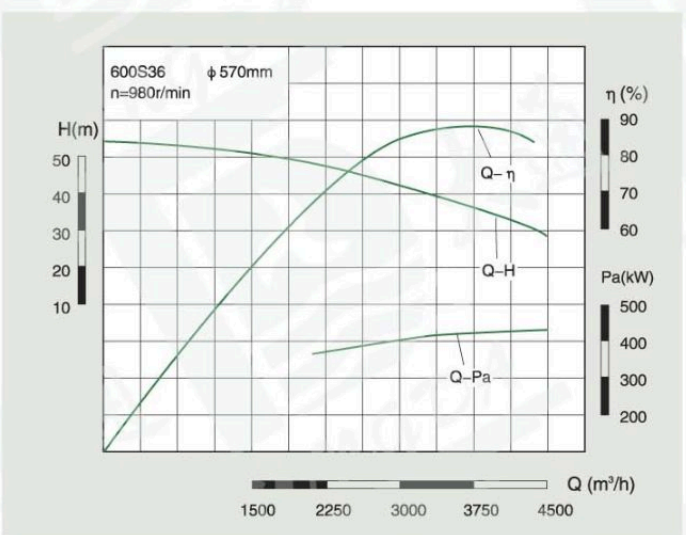


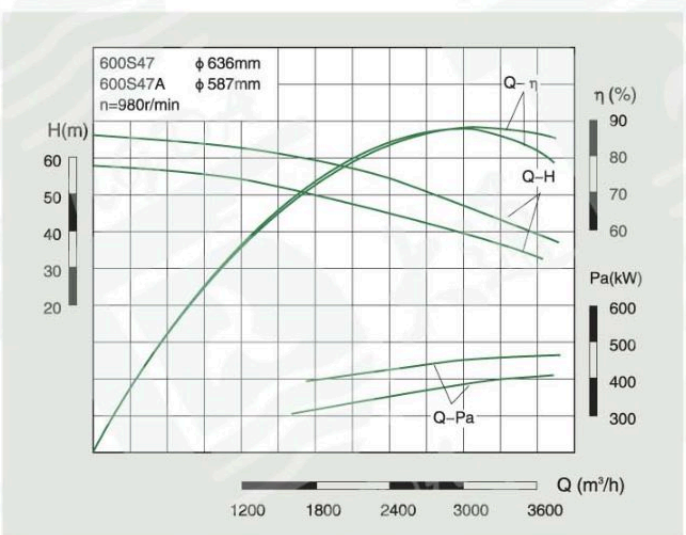



性 能 曲 线 Performance Curve

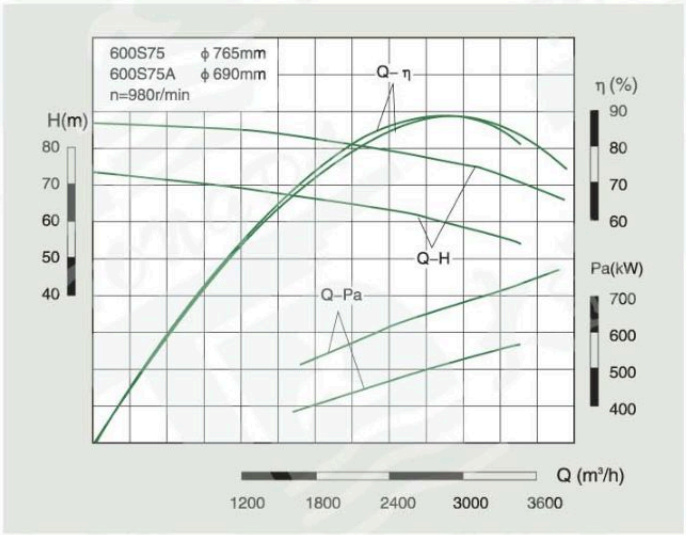


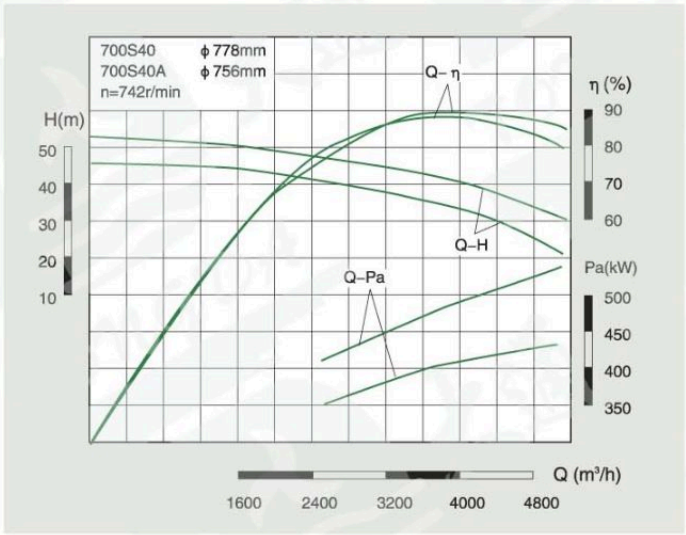

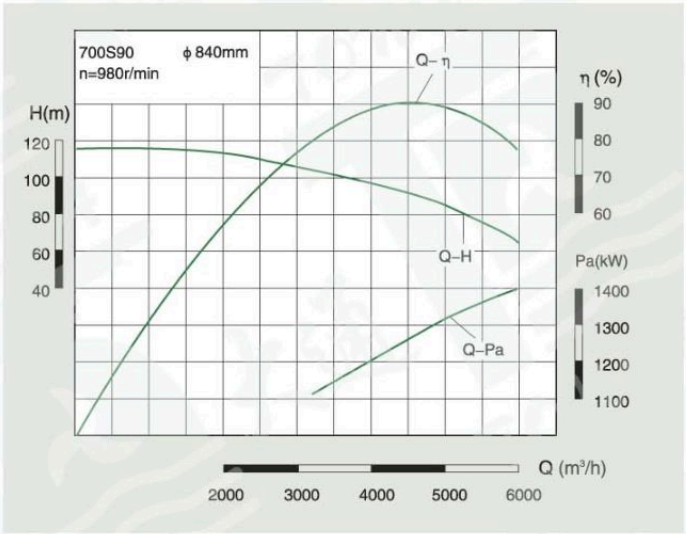


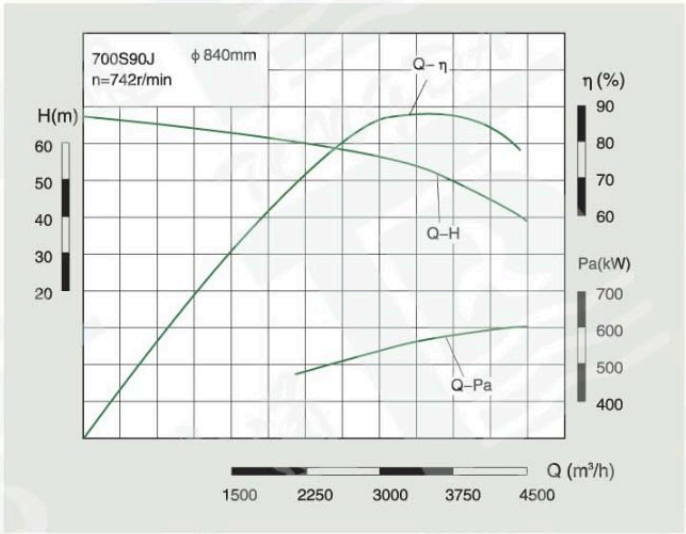


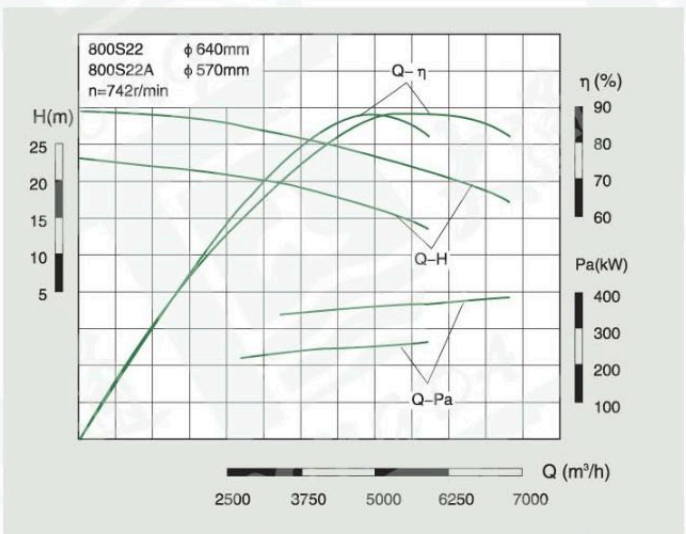


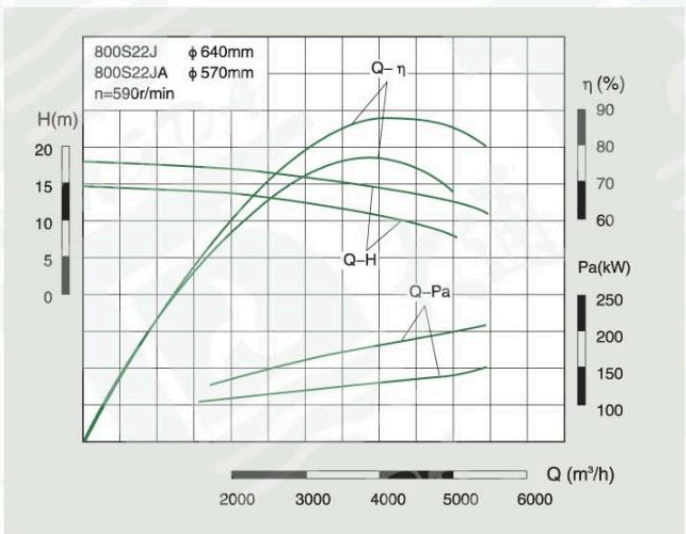



性 能 曲 线 Performance Curve

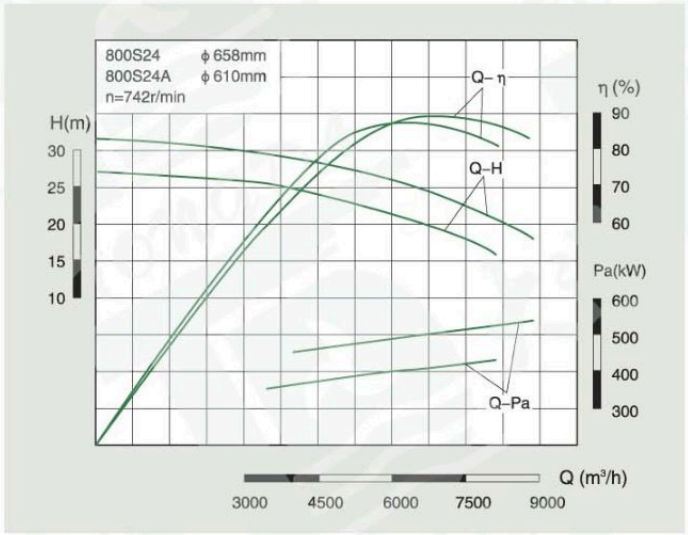


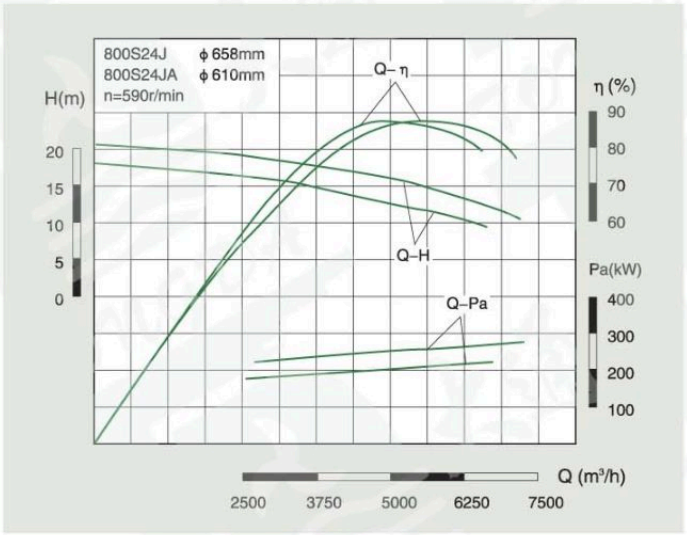

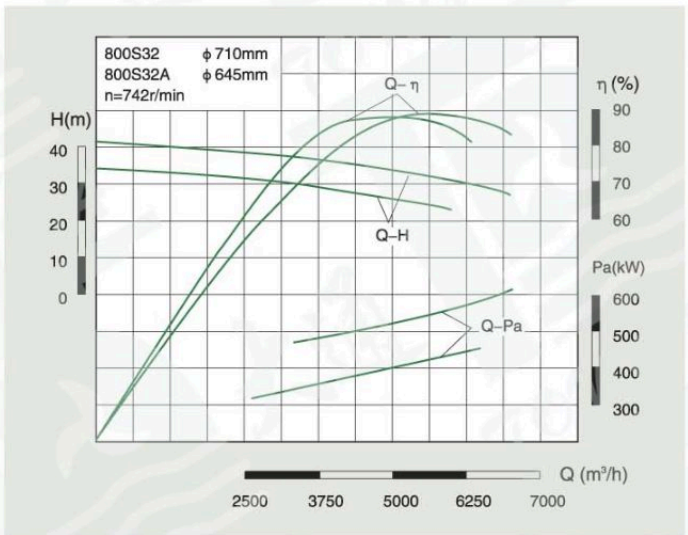


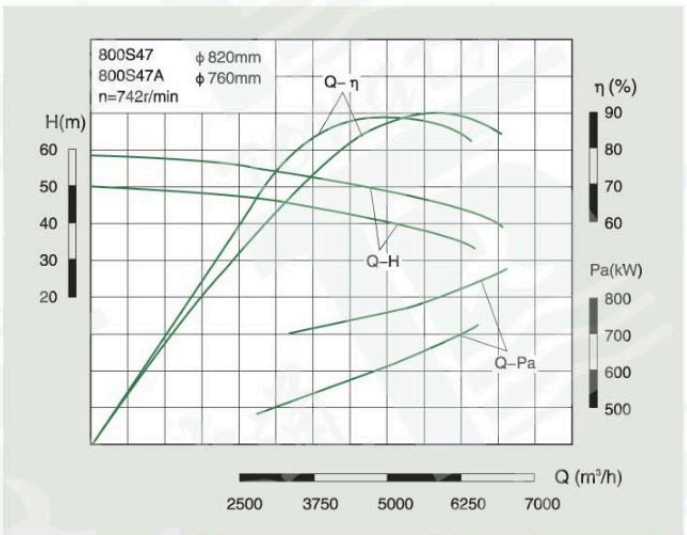


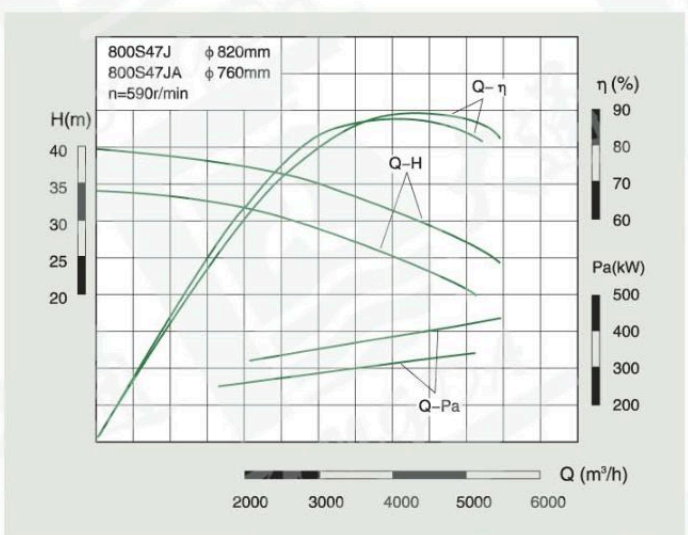


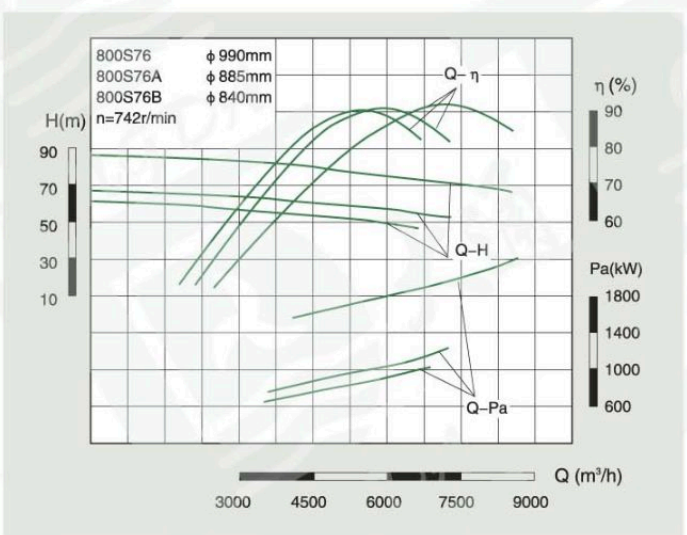


性 能 曲 线 Performance Curve

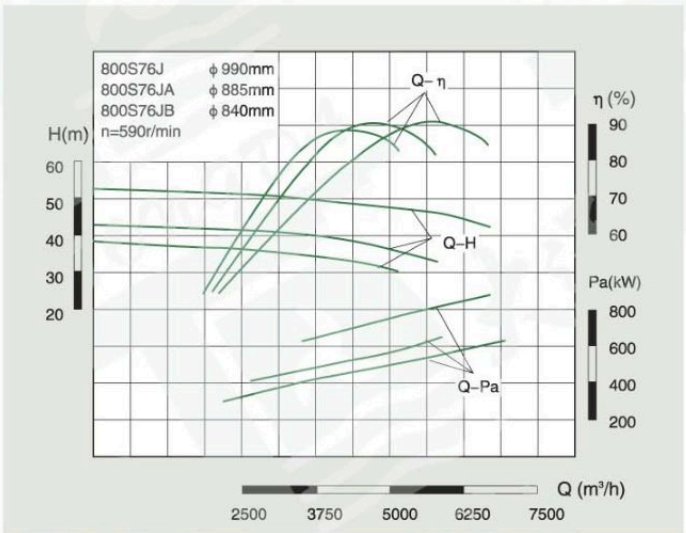


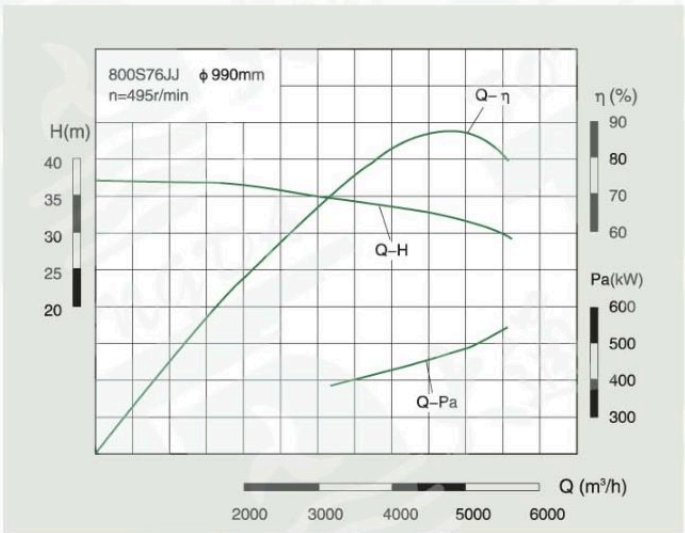

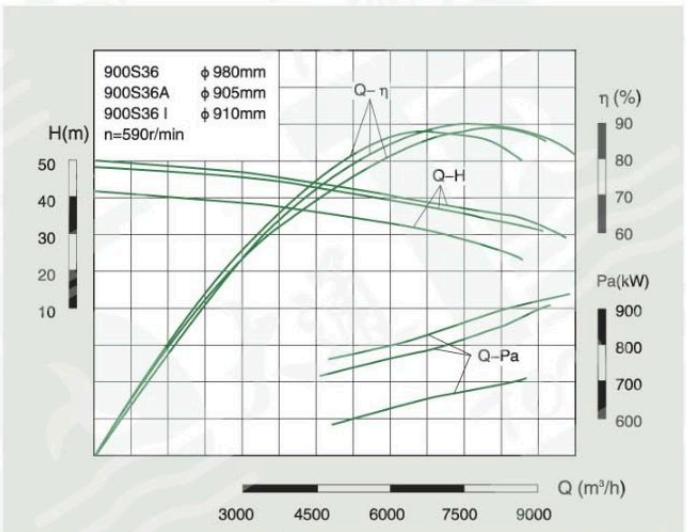

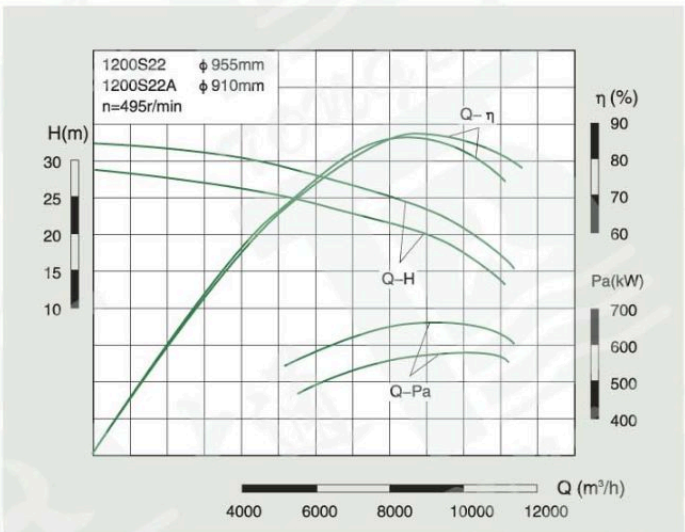

S、SM、SY、SF型泵外形尺寸图
Overall Dimensions Figure for Type S、SM、SY、SF

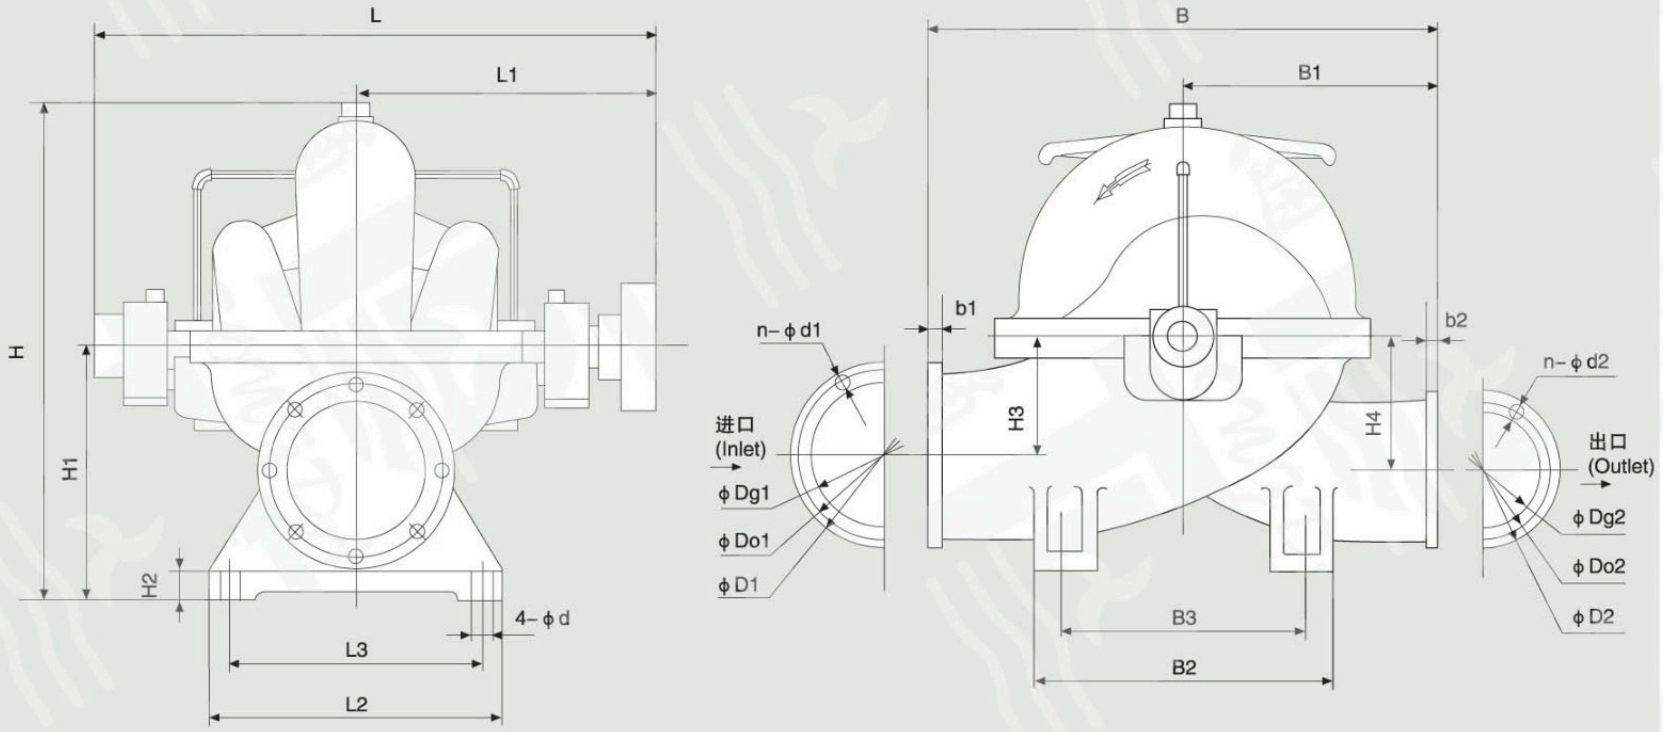

S、SM、SY、SF型泵外形尺寸表（1）

Overall dimensions Table for Type S、SM、SY、SF(1)

泵型号 Type	L	L1	L2	L3	B	B1	B2	B3	H	H1	H2	H3	H4	4–φd	进口法兰 Inlet Flange					出口法兰 Outlet Flange				
															φDg1	φDo1	φD1	φb1	n–φd1	φDg2	φDo2	φD2	φb2	n–φd2
150S50	705	388	300	250	550	250	340	250	455	285	25	140	140	4–φ18	150	240	280	24	8–φ23	100	180	215	22	8–φ18
150S78	704	388	300	250	550	250	340	250	472	285	25	140	155	4–φ18	150	240	280	24	8–φ23	100	180	215	22	8–φ18
15097	696	375	300	250	550	250	340	250	500	290	25	130	172	4–φ24	150	240	280	24	8–φ23	100	180	215	22	8–φ18
200S42	744	410	300	250	620	300	340	250	547	355	25	170	170	4–φ18	200	295	335	26	8–φ23	150	240	280	24	8–φ23
200S63	744	410	300	250	620	300	340	250	549	355	25	170	170	4–φ18	200	295	335	26	8–φ23	150	240	280	24	8–φ23
200S95	861	485	300	250	650	300	340	250	555	355	25	170	170	4–φ18	200	295	335	26	8–φ23	125	210	245	24	8–φ18
250S14	882	475	410	350	745	330	510	400	709	450	30	210	215	4–φ27	250	350	390	28	12–φ23	200	295	335	26	8–φ23
250S24	923	502	410	350	850	400	510	400	738	450	30	230	230	4–φ27	250	350	390	28	12–φ23	200	295	335	26	8–φ23
250S39	943	512	410	350	890	440	510	400	745	450	30	200	260	4–φ27	250	350	390	28	12–φ23	200	295	335	26	8–φ23
250S65	1046	581	410	350	880	400	510	400	796	450	30	240	290	4–φ27	250	350	390	28	12–φ23	150	240	280	24	8–φ23
300S12	978	522	520	450	1000	500	600	450	808	510	40	265	265	4–φ27	300	400	440	28	12–φ23	300	400	440	28	12–φ23
300S19	958	517	520	450	900	400	600	450	803	510	40	250	260	4–φ27	300	400	440	28	12–φ23	250	350	390	28	12–φ23
300S32	1062	574	520	450	880	410	600	450	824	510	40	260	270	4–φ27	300	400	440	28	12–φ23	250	350	390	28	12–φ23
300S58	1108	615	520	450	1070	530	600	450	830	510	40	250	310	4–φ27	300	400	440	28	12–φ23	250	350	390	28	12–φ23
300S90	1198	674	520	450	1046	470	600	450	898	510	40	268	325	4–φ27	300	400	440	28	12–φ23	200	295	335	26	8–φ23
350S16	1090	584	600	500	1168	584	690	500	970	620	50	310	310	4–φ34	350	460	500	30	16–φ23	350	460	500	30	16–φ23
350S26	1161	633	600	500	1040	460	690	500	963	620	50	290	300	4–φ34	350	460	500	30	16–φ23	300	400	440	28	12–φ23
350S44	1232	675	600	500	1080	510	690	500	980	620	50	300	300	4–φ34	350	460	500	30	16–φ23	300	400	440	28	12–φ23
350S75	1271	710	600	500	1250	600	690	500	1017	620	50	274	356	4–φ34	350	460	500	30	16–φ23	250	350	390	28	12–φ23
350S125	1431	809	600	500	1210	550	690	500	1080	620	50	330	410	4–φ34	350	460	500	50	16–φ23	200	295	335	30	12–φ23
500S13	1311.5	717.5	760	580	1550	775	1020	800	1251	800	55	410	410	4–φ41	500	620	670	34	20–φ25	500	620	670	34	20–φ25
500S22	1376.5	750	760	580	1460	640	1020	800	1266	800	55	410	410	4–φ41	500	620	670	34	20–φ25	400	515	565	32	16–φ25


S、SN、SY、SF型泵外形尺寸表（2）

Overall dimensions Table for Type S、SM、SY、SF(2)

泵型号 Type	L	L1	L2	L3	B	B1	B2	B3	H	H1	H2	H3	H4	4–φd	进口法兰 Inlet Flange					出口法兰 Outlet Flange				
															φDg1	φDo1	φD1	φb1	n–φd1	φDg2	φDo2	φD2	φb2	n–φd2
500S35	1373.5	766	760	580	1350	630	1020	800	1270	800	55	415	415	4–φ41	500	620	670	34	20–φ25	350	460	500	30	16–φ23
500S40	1637.5	905	760	580	1640	810	1020	800	1304	800	55	370	480	4–φ41	500	620	670	34	20–φ25	350	460	500	30	16–φ23
500S59	1637.5	905	760	580	1640	810	1020	800	1300	800	55	370	480	4–φ41	500	620	670	34	20–φ25	350	460	500	30	16–φ23
500S98	1639.5	912	760	580	1550	750	1020	800	1381	800	55	425	545	4–φ41	500	620	670	34	20–φ25	300	400	440	28	12–φ23
600S22	1471.5	810	940	760	1790	840	1020	800	1476	950	55	460	460	4–φ41	600	725	780	36	20–φ30	500	620	670	34	20–φ25
600S32	1609.5	882	940	760	1600	750	1020	800	1490	950	55	480	480	4–φ41	600	725	780	36	20–φ30	500	620	670	34	20–φ25
600S36	1869	1032	940	760	1800	800	1240	1000	1500	950	50	532	490	4–φ42	600	725	780	36	20–φ30	500	620	670	34	20–φ25
600S47	1694.5	940	940	760	1595	745	1020	800	1505	950	55	490	490	4–φ41	600	725	780	36	20–φ30	400	515	565	32	16–φ25
600S75	1694.5	940	940	760	1900	940	1020	800	1550	950	55	425	550	4–φ41	600	725	780	36	20–φ30	400	515	565	32	16–φ25
700S40	1970	885	1100	900	2020	820	1300	1000	1710	950	55	527	527	4–φ41	700	840	895	40	24–φ30	500	620	670	34	20–φ26
700S90	2197	1217	1200	1000	2000	900	1300	1000	1812	1060	50	595	688	4–φ45	700	840	895	40	24–φ30	500	650	715	46	20–φ33
800S22	2012	1097	1200	1000	2200	850	1200	900	2010	1250	60	755	695	4–φ42	800	920	975	45	24–φ30	700	840	895	45	24–φ30
800S24	2365	1287	1200	1000	2350	950	1200	900	2085	1265	60	755	695	4–φ42	800	920	975	44	24–φ30	700	840	895	40	24–φ30
800S32	2163	1220	1200	1000	2100	750	1200	1000	1908	1200	60	660	660	4–φ42	800	950	1015	44	24–φ33	600	725	780	44	20–φ30
800S47	2637	1457	1200	1000	2200	875	1200	1000	1895	1200	60	720	720	4–φ42	800	950	1015	44	24–φ33	600	725	780	36	20–φ30
800S76	2451	1387	1300	1000	2265	1000	1700	1350	2105	1250	70	700	850	4–φ58	800	950	1015	54	24–φ33	600	725	780	54	20–φ30
900S36	2460	1340	1400	1200	3250	1600	1800	1500	2460	1600	60	920	920	4–φ42	900	1050	1125	60	28–φ35	900	1050	1125	60	28–φ35
1200S22	3132	1697	1600	1250	2800	1250	2060	1800	2635	1700	90	870	870	8–φ55	1200	1450	1530	67	32–φ33	800	990	1070	67	24–φ33


S、SM、SY、SF型泵安装尺寸图（带公用底座）


Installation Dimensions Figure for Type S、SM、SY、SF(With Common Base)

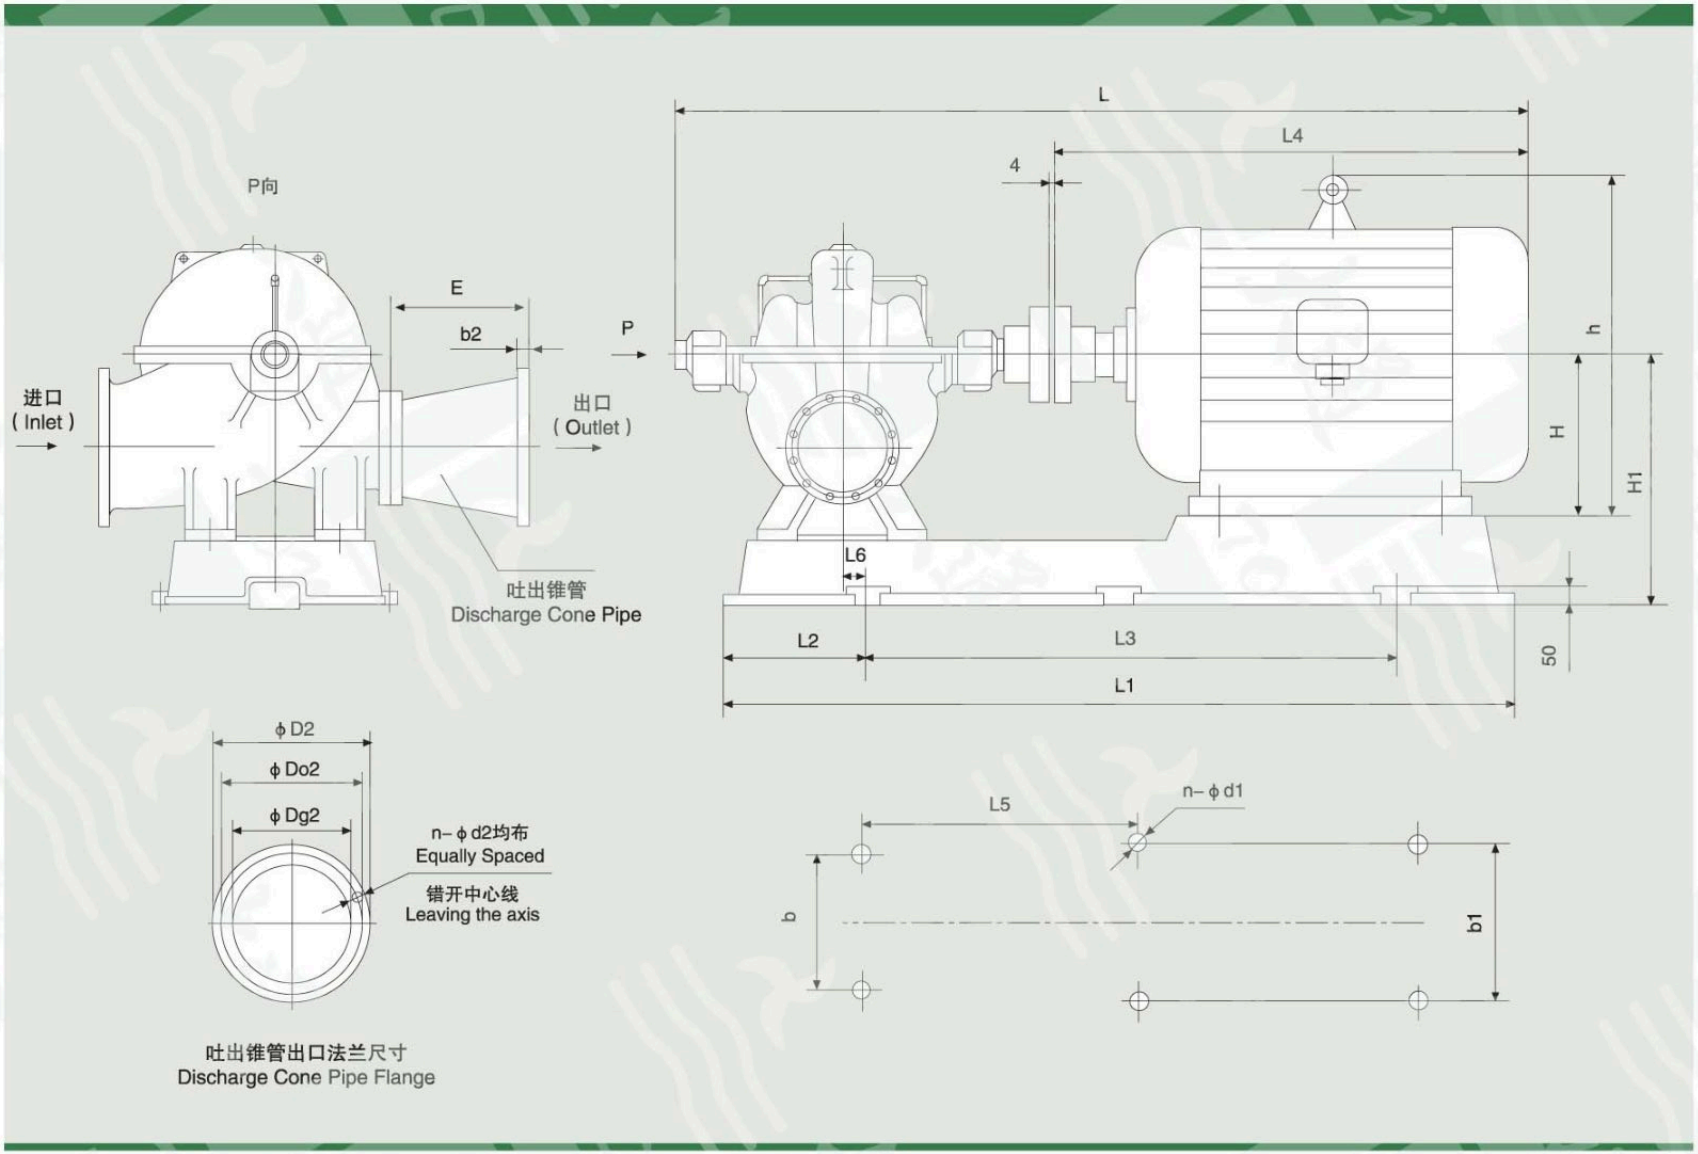


S、SM、SY、SF型泵安装尺寸图（不带公用底座）

Installation Dimensions Figure for Type S、SM、SY、SF(Withnot Common Base)

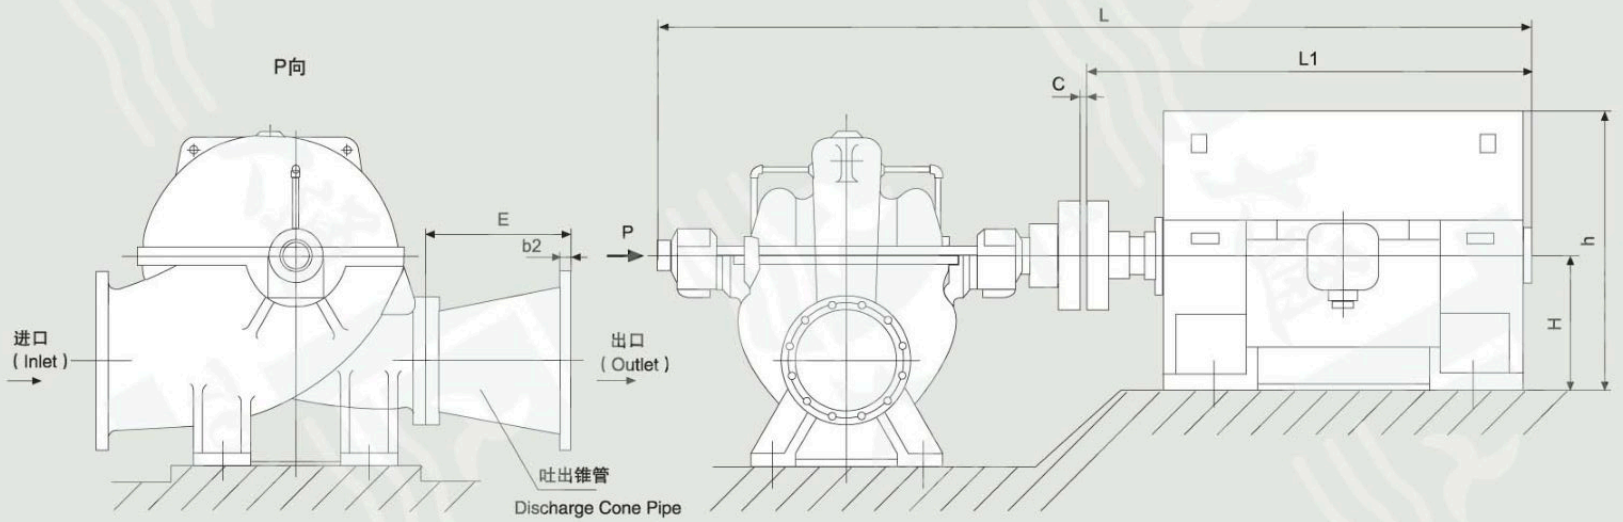

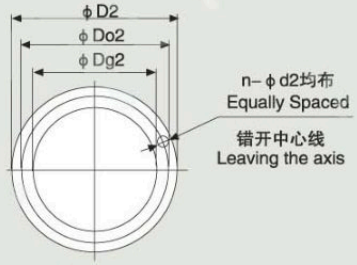

吐出锥管出口法兰尺寸
Discharge Cone Pipe Flange

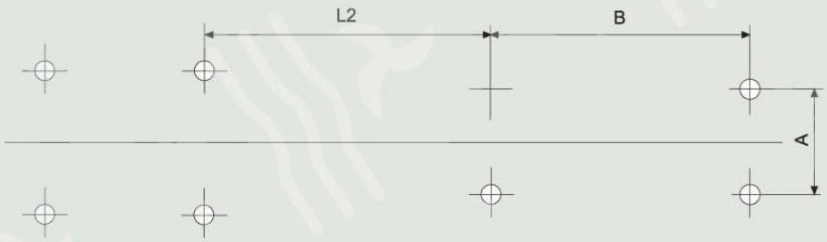

S、SM、SY、SF型泵安装尺寸表（带公用底座）表一

Installation dimensions table for Type S、SM、SY、SF(Whith Common Base)(1)

型号 Type	电动机 Motor		底板尺寸及重量 Common Base											H1	L	吐出锥管 Discharge Cone Pipe						
	电机型号 Motor Type	功率(kW) Power	L4	h	H	L1	L2	L3	L5	L6	b	b1	n–φd1			E	出口法兰 Outlet Flange					
																	φDg2	φDo2	φD2	b2	n–φd2	重量（kw） Weight
150S50	Y200L2–2	37	794	475	200	1165	180	750			390	500	4–φ25	380	1435	300	100	170	205	205	4–φ17.5	
150S50A	Y200L–2	30	677	475	200	1165	180	750			390	500	4–φ25	380	1318	300	100	170	205	205	4–φ17.5	
150S50B	Y180M–2	22	687	430	180	1077	207	670			480	480	4–φ25	380	1318	300	100	170	205	205	4–φ17.5	
150S78	Y250M–2	55	932	575	250	1360	280	800		190	430	585	4–φ30	395	1140	300	150	240	285	285	8–φ23	38
150S78A	Y225M–2	45	817	530	225	1240	280	750		183	540	540	4–φ30	395	1525	300	150	240	285	285	8–φ23	38
150S78B	Y200L–2	37	777	475	200	1240	280	680		190	504	504	4–φ30	395	1485	300	150	240	285	285	8–φ23	38
150S97	Y280S–2	75	1019	640	280	1415	265	850			410	640	4–φ25	400	1718	300	100	180	220	220	8–φ17.5	
150S97A	Y280S–2	75	1019	640	280	1415	265	850			410	640	4–φ25	400	1718	300	100	180	220	220	8–φ17.5	
150S97B	Y160M–2	11	617	385	160	1105	205	710			450	450	4–φ25	400	1306	300	100	180	220	220	8–φ17.5	
200S42	Y250M–2	55	932	575	250	1360	230	850		178	450	620	4–φ25	465	1680	350	200	295	340	340	8–φ23	60
200S42A	Y200L2–2	37	777	475	200	1360	230	850		178	450	620	4–φ25	465	1525	350	200	295	340	340	8–φ23	60
200S63	Y280S–2	75	1017	640	280	1456	306	850		206	455	655	4–φ25	450	1765	350	200	295	340	340	8–φ23	60
200S63A	Y250M–2	55	947	530	250	1318	238	800		191	455	600	4–φ25	450	1695	350	200	295	340	340	8–φ23	60
200S63B	Y225M–2	45	832	530	225	1256	206	800		198	550	550	4–φ25	450	1580	350	200	295	340	340	8–φ23	60
200S95	Y315S–2	110	1242	865	315	1527	250	1000		199	455	730	4–φ25	450	2109	375	200	295	335	335	8–φ23	58
200S95A	Y315S–2	110	1242	865	315	1527	250	1000		199	455	730	4–φ25	450	2109	375	200	295	335	335	8–φ23	58
200S95B	Y280S–2	75	1002	640	280	1456	306	850		206	455	655	4–φ25	450	1867	375	200	295	335	335	8–φ23	58
250S14	Y200L–4	30	777	475	200	1426	256	940		233	600	600	4–φ28	560	1603	300	250	350	395	395	12–φ23	72
250S14A	Y180L–4	22	712	430	180	1426	256	940		233	600	600	4–φ28	560	1538	300	250	350	395	395	12–φ23	
250S24	Y225M–4	45	847	530	225	1495	350	800		215	640	640	4–φ25	590	1804	300	250	335	375	375	12–φ18	70
250S24A	Y225S–4	37	822	530	225	1495	350	800		215	640	640	4–φ25	590	1779	300	250	335	375	375	12–φ18	
250S39	Y280S–4	75	1002	640	280	1613	250	1080	540	233	680	680	6–φ25	550	1948	300	250	350	395	395	12–φ23	72
250S39A	Y250M–4	55	932	575	250	1613	250	1080	540	233	680	680	6–φ25	550	1878	300	250	350	395	395	12–φ23	72

S、SM、SY、SF型泵安装尺寸表（带公用底座）表二

Installation dimensions table for Type S、SM、SY、SF(Whith Common Base)(2)

型号 Type	电动机 Motor		底板尺寸及重量 Common Base											H1	L	吐出锥管 Discharge Cone Pipe						
	电机型号 Motor Type	功率(kW) Power	L4	h	H	L1	L2	L3	L5	L6	b	b1	n–φd1			E	出口法兰 Outlet Flange					
																	φDg2	φDo2	φD2	b2	n–φd2	重量（kw） Weight
250S65	Y315M–4	132	1342	865	315	1822	250	1200	600	237	610	760	6–φ25	570	2392	500	250	350	395	28	12–φ23	89
250S65A	Y315S_4	110	1272	865	315	1822	250	1200	600	237	610	760	6–φ25	570	2322	500	250	350	395	28	12–φ23	89
300S12	Y225S_4	37	822	530	225	1540	280	980		288	700	700	4–φ30	620	1804	无吐出锥管 Without unless required						
300S12A	Y200L–4	30	777	475	200	1540	280	980		288	700	700	4–φ30	620	1759							
300S19	Y250M–4	55	932	575	250	1618	288	1050		288	700	700	4–φ30	620	1894	300	300	400	445	28	12–φ23	86
300S19A	Y225M–4	45	847	530	225	1618	288	1050		288	700	700	4–φ30	620	1809	300	300	400	445	28	12–φ23	86
300S32	Y315S_4	110	1272	865	315	1808	300	1120	610	290	720	770	6–φ30	610	2338	300	300	400	445	28	12–φ23	86
300S32A	Y280S–4	75	1002	640	280	1757	295	1160	580	301	710	710	6–φ30	650	2078	300	300	400	445	28	12–φ23	86
350S16	Y280S–4	75	1002	640	280	1801	300	1200	600	330	825	825	6–φ40	720	2096	无吐出锥管 Without unless required						
350S16A	Y250M–4	55	932	575	250	1801	300	1200	600	330	825	825	6–φ40	720	2026							

S、SM、SY、SF型泵安装尺寸表（不带公用底座）表一

Installation dimensions table for Type S、SM、SY、SF(Whithout Common Base)(1)

型号 Type	电动机 Motor			电动机尺寸 Motor Size							L	L_2	吐出锥管 Discharge Cone Pipe						
													E	出口法兰 Outlet Flange					
	电机型号 Motor Type	功率(kW) Power	电压 (V)	C	L1	H	h	B	A	n–φd1				φDg2	φDo2	φD2	B2	n–φd2	重量（kw） Weight
300S32	Y315S–4	110	380	4	1272	315	865	406	508	4–φ28	2338	739	300	300	400	440	28	12–φ23	98
300S32A	Y280S–4	75	380	4	1002	280	640	368	457	4–φ24	2068	683	300	300	400	440	28	12–φ23	98
300S58	Y315M1–4	185	380	5	1272	315	865	457	508	4–φ28	2325	781	300	300	400	440	28	12–φ23	98
300S58A	Y315L1–4	160	380	5	1342	315	865	508	508	4–φ28	2455	781	300	300	400	440	28	12–φ23	98
300S58B	Y315M–4	132	380	5	1342	315	865	457	508	4–φ28	2455	781	300	300	400	440	28	12–φ23	98
300S90	Y355L2–4	315	380	5	1572	355	1035	630	610	4–φ28	2775	878	500	300	400	440	28	12–φ23	135
300S90A	Y355L1–4	280	380	5	1572	355	1035	630	610	4–φ28	2775	878	500	300	400	440	28	12–φ23	135
300S90B	Y355M1–4	220	380	5	1572	355	1035	560	610	4–φ28	2775	878	500	300	400	440	28	12–φ23	135
350S16	Y280S–4	75	380	4	1002	280	640	368	457	4–φ24	2096	668	一般不配吐出锥管 Without unless required						
350S16A	Y250M–4	55	380	4	932	250	575	349	406	4–φ24	2026	668							
350S26	Y315M–4	132	380	4	1342	315	865	457	508	4–φ28	2507	773	300	350	460	500	30	16–φ23	132
350S26A	Y280M–4	90	380	4	1052	280	640	419	457	4–φ24	2217	743	300	350	460	500	30	16–φ23	132
350S44	Y355M1–4	220	380	5	1572	355	1035	560	610	4–φ28	2809	854	300	350	460	500	30	16–φ23	132
350S44A	Y315L1–4	160	380	5	1342	315	865	508	508	4–φ28	2579	816	300	350	460	500	30	16–φ23	132
350S75	Y450I–4	355	10000	5	2182	450	1475	1120	800	4–φ35	3458	1030	500	350	460	500	30	16–φ23	178
350S75A	Y355L1–4	280	380	5	1572	355	1035	630	610	4–φ28	2848	889	500	350	460	500	30	16–φ23	178
350S75B	Y355M1–4	220	380	5	1572	335	1035	560	610	4–φ28	2848	889	500	350	460	500	30	16–φ23	178
350S125	Y5001–4	710	10000	7	2552	500	1700	1250	900	4–φ42	3990	1251	750	350	470	520	38	16–φ23	245
350S125A	Y4505–4	560	10000	7	2182	450	1475	1120	800	4–φ35	3620	1131	750	350	470	520	38	16–φ23	245
350S125B	Y4504–4	500	10000	7	2182	450	1475	1120	800	4–φ35	3620	1131	750	350	470	520	38	16–φ23	245

S、SM、SY、SF型泵安装尺寸表（不带公用底座）表二

Installation dimensions table for Type S、SM、SY、SF(Whithout Common Base)(2)

型号 Type	电动机 Motor			电动机尺寸 Motor Size							L	L_2	吐出锥管 Discharge Cone Pipe						
	电机型号 Motor Type	功率(kW) Power	电压 (V)	C	L1	H	h	B	A	n–φd1			E	出口法兰 Outlet Flange					
														φDg2	φDo2	φD2	B2	n–φd2	重量（kw） Weight
500S13	Y315L1–6	110	380	5	1342	315	865	508	508	4–φ28	2660	823	一般不配吐出锥管 Without unless required						
500S13A	Y315S–6	75	380	5	1272	315	865	406	508	4–φ28	2590	823							
500S22	Y355M2–6	185	380	5	1572	355	1035	560	610	4–φ28	2953	889	600	500	620	670	34	20–φ25	350
500S22A	Y315L2–6	132	380	5	1342	315	865	508	508	4–φ28	2718	851	600	500	620	670	34	20–φ25	350
500S35	Y450–6	280	10000	6	2182	450	1475	1120	800	4–φ35	3561	1047	800	500	620	670	34	20–φ25	415
500S35A	Y355L1–6	220	380	6	1572	355	1035	630	610	4–φ28	2953	910	800	500	620	670	34	20–φ25	415
500S40	Y4002–6	280	6000	6	1980	400	1330	1000	710	4–φ35	3623	1168	一般不配吐出锥管 Without unless required						
500S40A	Y3556–6	250	6000	6	1890	355	1170	900	630	4–φ28	3533	1148							
500S59	Y4506–6	450	10000	7	2182	450	1475	1200	800	4–φ35	3826	1187	800	500	620	670	34	20–φ25	415
500S59A	Y4505–6	400	10000	7	2182	450	1475	1120	800	4–φ35	3826	1187	800	500	620	670	34	20–φ25	415
500S59B	Y4503–6	315	10000	7	2182	450	1475	1120	800	4–φ35	3826	1187	800	500	620	670	34	20–φ25	415
500S98	Y5005–6	800	10000	7	2552	500	1700	1250	900	4–φ42	4198	1358	1000	500	620	670	34	20–φ25	480
500S98A	Y5003–6	630	10000	7	2552	500	1700	1250	900	4–φ42	4198	1358	1000	500	620	670	34	20–φ25	480
500S98B	Y5002–6	560	10000	7	2552	500	1700	1250	900	4–φ42	4198	1358	1000	500	620	670	34	20–φ25	480
600S22	Y450–6	280	10000	6	2182	450	1475	1120	800	4–φ35	3659	1005	一般不配吐出锥管 Without unless required						
600S22A	Y355M2–6	185	380	6	1572	355	1035	560	610	4–φ28	3051	864							
600S32	Y4505–6	400	10000	10	2182	450	1475	1120	800	4–φ35	3801	1077	一般不配吐出锥管 Without unless required						
600S32A	Y450–6	250	10000	10	2182	450	1475	1120	800	4–φ35	3801	1077							
600S36	Y5001–6	500	10000	6	2552	500	1700	1250	900	4–φ42	4297	1315	一般不配吐出锥管 Without unless required						
600S47	Y5002–6	560	10000	7	2552	500	1700	1250	900	4–φ42	4253	1292							

S、SM、SY、SF型泵安装尺寸表（不带公用底座）表三

Installation dimensions table for Type S、SM、SY、SF(Whithout Common Base)(3)

型号 Type	电动机 Motor			电动机尺寸 Motor Size							L	L_2	吐出锥管 Discharge Cone Pipe						
	电机型号 Motor Type	功率(kW) Power	电压 (V)	C	L1	H	h	B	A	n–φd1			E	出口法兰 Outlet Flange					
														φDg2	φDo2	φD2	B2	n–φd2	重量（kw） Weight
600S47A	Y4506–6	450	10000	7	2182	450	1415	1120	800	4–φ35	3883	1132	一般不配吐出锥管 Without unless required						
600S75	Y5601–6	900	10000	7	2902	560	1850	1400	1000	4–φ42	4603	1367	一般不配吐出锥管 Without unless required						
600S75A	Y5003–6	630	10000	7	2552	500	1700	1250	900	4–φ42	4253	1292							
700S40	Y5006–8	560	10000	8	2552	500	1700	1250	900	4–φ42	4530	1168	一般不配吐出锥管 Without unless required						
700S40A	Y5005–8	500	10000	8	2552	500	1700	1250	900	4–φ42	4530	1168							
700S90	Y6302–6	1600	10000	8	3102	630	2105	1600	1370	4–φ48	5307	1557	一般不配吐出锥管 Without unless required						
700S90J	Y5601–8	630	10000	8	3102	560	1700	1400	1000	4–φ42	4860	1527							
800S22	Y5004–8	450	10000	6	2422	500	1560	1250	900	4–φ42	4528	1453	一般不配吐出锥管 Without unless required						
800S22J	Y500–10	250	10000	6	2422	500	1560	1250	900	4–φ42	4528	1453							
800S22A	Y5001–8	315	10000	6	2422	500	1560	1250	900	4–φ42	4528	1453							
800S22JA	Y355L–10	185	380	6	1692	355	1130	630	610	4–φ28	3710	1069							
800S24	Y500S–8	630	6000	7	2220	500	1500	1250	900	4–φ42	4592	1521	一般不配吐出锥管 Without unless required						
800S24J	Y5004–10	315	10000	7	2422	500	1560	1250	900	4–φ42	4441	1330							
800S24A	Y5005–8	500	10000	7	2422	500	1560	1250	900	4–φ42	4441	1330							
800S24JA	Y5003–10	280	10000	7	2422	500	1560	1250	900	4–φ42	4441	1330							
800S32	Y5601–8	630	10000	6	2672	560	1700	1400	1000	4–φ42	4841	1528	一般不配吐出锥管 Without unless required						
800S32A	Y5004–8	450	10000	6	2422	500	1560	1250	900	4–φ42	4589	1453							
800S47	Y6301–8	1000	10000	8	3102	630	1930	1600	1120	4–φ48	5747	1795	一般不配吐出锥管 Without unless required						
800S47J	Y5601–10	450	10000	8	2672	560	1700	1400	1000	4–φ42	5180	1765							
800S47A	Y5602–8	710	10000	8	2672	560	1700	1400	1000	4–φ42	5180	1765							

S、SM、SY、SF型泵安装尺寸表（不带公用底座）表四

Installation dimensions table for Type S、SM、SY、SF(Whithout Common Base)(4)

型号 Type	电动机 Motor			电动机尺寸 Motor Size							L	L_2	吐出锥管 Discharge Cone Pipe						
	电机型号 Motor Type	功率(kW) Power	电压 (V)	C	L1	H	h	B	A	n–φd1			E	出口法兰 Outlet Flange					
														φDg2	φDo2	φD2	B2	n–φd2	重量（kw） Weight
800S47JA	Y5005–10	355	10000	8	2422	500	1560	1250	900	4–φ42	4930	1680	一般不配吐出锥管 Without unless required						
800S76	Y710–7–8	1800	10000	8	3202	710	2330	1800	1400	4–φ56	5661	1777	一般不配吐出锥管 Without unless required						
800S76J	Y6303–10	1000	10000	8	3102	630	1930	1600	1120	4–φ48	5561	1727							
800S76A	Y6303–8	1250	10000	8	3102	630	1930	1600	1120	4–φ48	5561	1727							
800S76JA	Y5605–10	710	10000	8	2672	560	1700	1400	1000	4–φ42	5139	1697							
800S76B	Y6302–8	1120	10000	8	3102	630	1930	1600	1120	4–φ48	5561	1727							
800S76JB	Y5603–10	560	10000	8	2672	560	1700	1400	1000	4–φ42	5131	1697							
800S76JJ	Y6302–12	630	10000	8	3102	630	1930	1600	1120	4–φ48	5561	1727							
900S36	Y6303–10	1000	10000	8	3102	630	1930	1600	1120	4–φ48	5570	1436	一般不配吐出锥管 Without unless required						
900S36A	Y6301–10	800	10000	8	3102	630	1930	1600	1120	4–φ48	5570	1436							
900S36I	Y6303–10	1000	10000	8	3102	630	1930	1600	1120	4–φ48	5570	1436							
1200S22	Y6304–12	800	10000	8	3102	630	1930	1600	1120	4–φ48	6242	1600	一般不配吐出锥管 Without unless required						
1200S22A	Y6303–12	710	10000	8	3102	630	1930	1600	1120	4–φ48	6242	1600							

S型泵代替SH型泵型号对照表

The table for Type S contrast Type SH

S型	同性能SH型泵 As the same as type SH	S型	同性能SH型泵 As the same as type SH
150S50	6SH-9	350S26	14SH-19
150S50A	6SH-9A	350S26A	14SH-19A
150S50B	6SH-9B	350S44	14SH-13
150S78	6SH-6	350S44A	14SH-13A
150S78A	6SH-6A	350S75	14SH-9
150S78B	6SH-6B	350S75A	14SH-9A
200S42	8SH-13	350S75B	14SH-9B
200S42A	8SH-13A	350S125	14SH-6
200S63	8SH-9	350S125A	14SH-6A
200S63A	8SH-9B	350S125B	14SH-6B
200S95	8SH-6	500S13	20SH-28
200S95A	8SH-6A	500S22	20SH-19
200S95B	8SH-6B	500S22A	20SH-19A
250S14	10SH-19	500S35	20SH-13
250S14A	10SH-19A	500S35A	20SH-13A
250S24	10SH-13	500S59	20SH-9
250S24A	10SH-13A	500S59A	20SH-9A
250S39	10SH-9	500S59B	20SH-9B
250S39A	10SH-9A	500S98	20SH-6
250S65	10SH-6	500S98A	20SH-6A
250S65A	10SH-6A	500S98B	20SH-6B
300S12	12SH-28	600S32	24SH-19
300S12A	12SH-28A	600S32A	24SH-19A
300S19	12SH-19	600S47	24SH-13
300S19A	12SH-19A	600S75	24SH-9
300532	12SH-13	600S75A	24SH-9A
300532A	12SH-13A	700S90	28SH-10
300S58	12SH-9	700S47	28SH-12
300S58A	12SH-9A	800S22	32SH-24
300S58B	12SH-9B	800S22A	32SH-24A
300S90	12SH-6	800S32	32SH-19
300S90A	12SH-6A	800S76	32SH-10
300S90B	12SH-6B	800S76J	32SH-10J
350S16	14SH-28	1200S22	48SH-22
350S16A	14SH-28A	1200S22A	48SH-22A