通大 TONGDA


Type SS

不銹鋼 深井離心泵 Deep Well pumps



專利產品 PATENT PRODUCTS

外形尺寸圖 Outline Diagram

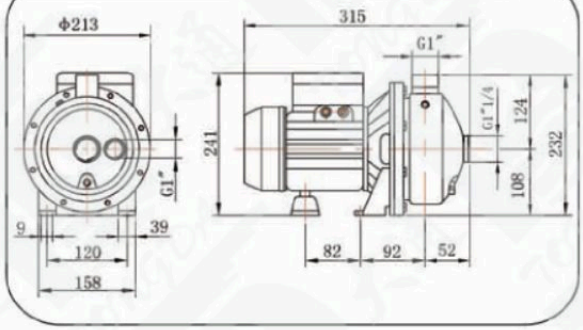

用途 applications

該水泵過流部份采用SUS304不銹鋼制造，適用于抽取清潔的井水河水或湖水，水泵配有噴射裝置，可從最大30米深處吸上水，可廣泛用于家庭、商場、工廠等抽水、衛洗、噴灌等用途。

The wet parts of the pump are made from SUS304 stainle -ss steel, suitable for pumping clean water from well,river and lake, supplied with deep well injector kits, the pump is ideal for supplying water from a source to 30m depth fo -r home, ship or plant uses, such as water supply, washing , sprinkling and etc.

工作條件 Working Condition

適用于對不銹鋼SUS304不產生腐蝕的潔淨介質。
最大工作壓力：8bar
介質溫度範圍：-15℃~+80℃

Suitable for transporting clean media which are non-aggressive to stainless steel SUS304.
Max.working pressure:8bar
Liquid temperature range:-15℃~+40℃

Type SS 型不銹鋼深井離心泵

Deep Well pumps

材 質 Materials

泵壳体、后盖、叶轮以及泵轴：SUS304
底阀及喷射器：铸铁
喷嘴及喷管：工程塑料加玻纤
机械密封：丁腈橡胶/石墨/碳化硅
O形圈：丁腈橡胶

Casing, back cover, impeller and pump shaft:SUS304
Foot valve and injector housing:Casting iron
Jet and venturi:Glass filled engineering plastic
Mechanical seal:NBR/carbon/SiC
O rings:NBR

電 機 Motor

防护等级：IP54或IP55
绝缘等级：B级或F级
使用环境温度范围：-15℃~+40℃
可按用户要求增加过热保护装置

Protection Class:IP54 or IP55
Insulation Class:Class B or Class F
Ambient temperature range:-15℃~+40℃
Overload switch is available upon request.

性能表 Performance data:

n=2900rpm

型號 Model	出口壓力(千帕) Outlet Pressure (kPa)	水源深度（米）Deth to water (m)					
		6	10	15	20	26	30
		輸出水量（升/分鐘）Output flow (1/min)					
SS075	220	35	31	27	22	15	-
	320	27	24	20	15	10	-
	360	16	13	10	8	5	-
最大開關壓力(千帕) Max.Shut Off Press.(KPa)		470	445	420	400	360	-

型號 Model	出口壓力(千帕) Outlet Pressure (kPa)	水源深度（米）Deth to wate (m)					
		6	10	15	20	26	30
		輸出水量（升/分鐘）Output flow (1/min)					
SS090	220	44	39	35	30	24	15
	320	36	32	28	20	15	5
	360	25	19	15	12	5	-
最大開關壓力（千帕） Max:Shut Off Press.(KPa)		510	480	450	420	380	340